


Heizspannung		
Tension de chauffage	v_f	= 4,0 V
Filament voltage		
Heizstrom		ca.
Courant de chauffage	i_f	= env. 1,1 mA
Filament current		appr.
Anodenspannung		
Tension anodique	v_a	= 200 V
Anode voltage		
Schirmgitterspannung		
Tension de grille-écran	v_{g^1}	= 100 V
Screen-grid voltage		
Normaler Anodenstrom		ca.
Courant anodique normal	i_a	= env. 4,5 mA
Normal anode current		appr.
(vg = -2 V)		
Normaler Anodenstrom		ca.
Courant anodique normal	i_a	= env. 0,01 mA
Normal anode current		appr.
(vg = -35 V)		
Verstärkungsfaktor		
Coefficient d'amplification	$g(k)$	= 2000
Amplification factor		
Steilheit (max.)		
Inclinaison (max.)	$S_{max.}$	= 3,5 mA/V
Slope (max.)		
Steilheit		
Inclinaison	S	= 2 mA/V
Slope		
(vg = -2 V)		
Steilheit		
Inclinaison	S	= 0,005 mA/V
Slope		
(vg = -35 V)		
Innerer Widerstand (norm.)		
Résistance intérieure (norm.)	R_i	= 1 M.Ω
Internal resistance (norm.)		
(vg = -2 V)		
Innerer Widerstand (norm.)		
Résistance intérieure (norm.)	R_i	> 10 M.Ω
Internal resistance (norm.)		
(vg = -35 V)		
Anoden-Gitterkapazität		
Capacité grille-plaque	C_{ag}	= 0,002 μμF
Anode-grid capacity		
Max. Länge		
Longueur max.	l	= 138 mm
Overall length		
Grösster Durchmesser		
Diamètre max.	d	= 51 mm
Max. diameter		
Sockel		
Culot		= 0 35
Base		
Sockelschaltung		
Connexion du culot		= S XVI
Base connection		

Anwendung:	H.F.-Verstärkung	Z.F.-Verstärkung
Applications:	Amplification h.f.	Amplification m.f.
Function:	H.F. amplification	I.F. amplification

**PHILIPS
MINIWATT
E 447**

$V_f = 4,0V$
 $V_{max} = 200V$
 $V_{g'} = 100V$
 $V_g = 2-35V$
 $S_{max} = 3,5mA/V$

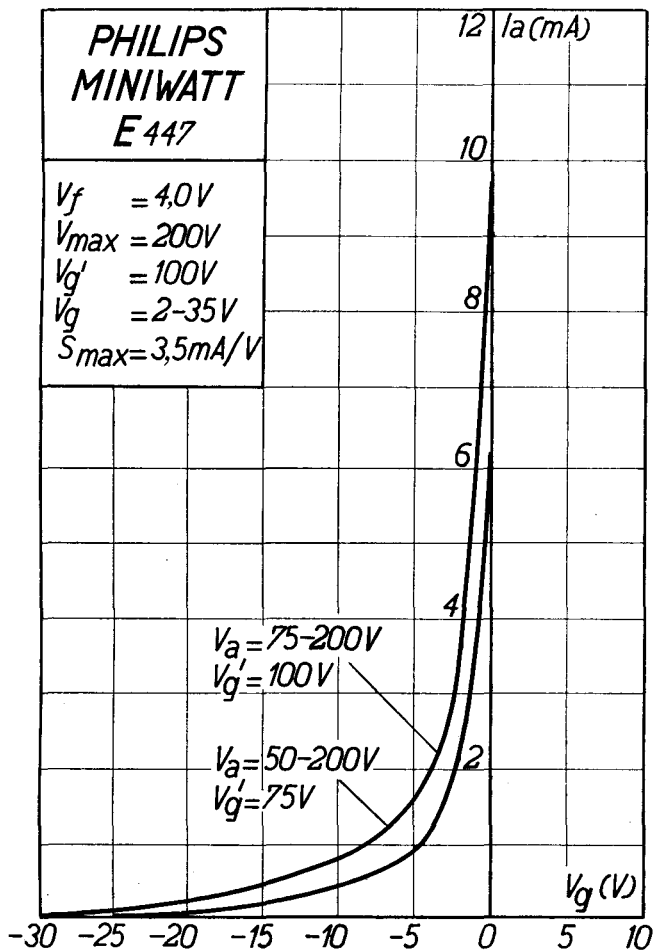


Heizspannung						
Tension de chauffage					V_f	= 4,0 V
Filament voltage						
Heizstrom						ca.
Courant de chauffage					I_f	= env. 1,1 A
Filament current						appr.
Anodenspannung						
Tension anodique					V_a	= 200 V
Anode voltage						
Schirmgitterspannung						
Tension de grille-écran					$V_{g'}$	= 100 V
Screen-grid voltage						
Normaler Anodenstrom						
Courant anodique normal					I_a	= 4,5 mA
Normal anode current						
(vg = ca. env. appr. -2 V)						
Normaler Anodenstrom						
Courant anodique normal.					I_a	= 0,01 mA
Normal anode current						
(vg = ca. env. appr. -50 V)						
Verstärkungsfaktor						
Coefficient d'amplification					$g(k)$	= 2000
Amplification factor						
Steilheit (max.)						
Inclinaison (max.)					$S_{max.}$	= 3,5 mA/V
Slope (max.)						
Steilheit						
Inclinaison					S	= 2,3 mA/V
Slope						
(vg = ca. env. appr. -2 V)						
Steilheit						
Inclinaison					S	= 0,002 mA/V
Slope						
(vg = ca. env. appr. -50 V)						
Innerer Widerstand (norm.)						
Résistance intérieure (norm.)					R_i	= 1 M. Ohm
Internal resistance (norm.)						
(vg = ca. env. appr. -2 V)						
Innerer Widerstand (norm.)						
Résistance intérieure (norm.)					R_i	> 10 M. Ohm
Internal resistance (norm.)						
(vg = ca. env. appr. -50 V)						
Anoden-Gitterkapazität						
Capacité grille-plaque					C_{ag}	= 0,002 $\mu\mu\text{F}$
Anode-grid capacity						
Max. Länge						
Longueur max.					l	= 138 mm
Overall length						
Grösster Durchmesser						
Diamètre max.					d	= 51 mm
Max. diameter						
Sockel						
Culot						= 0 35
Base						
Sockelschaltung						
Connexion du culot						= S XVI
Base connection						

Anwendung:	H.F.-Verstärkung	Z.F.-Verstärkung
Applications:	Amplification h.f.	Amplification m.f.
Function:	H.F. amplification	I.F. amplification

**PHILIPS
MINIWATT
E 447**


$V_f = 4,0V$
 $V_{max} = 200V$
 $V_{g'} = 100V$
 $V_g = -2-50V$
 $S_{max} = 3,5mA/V$

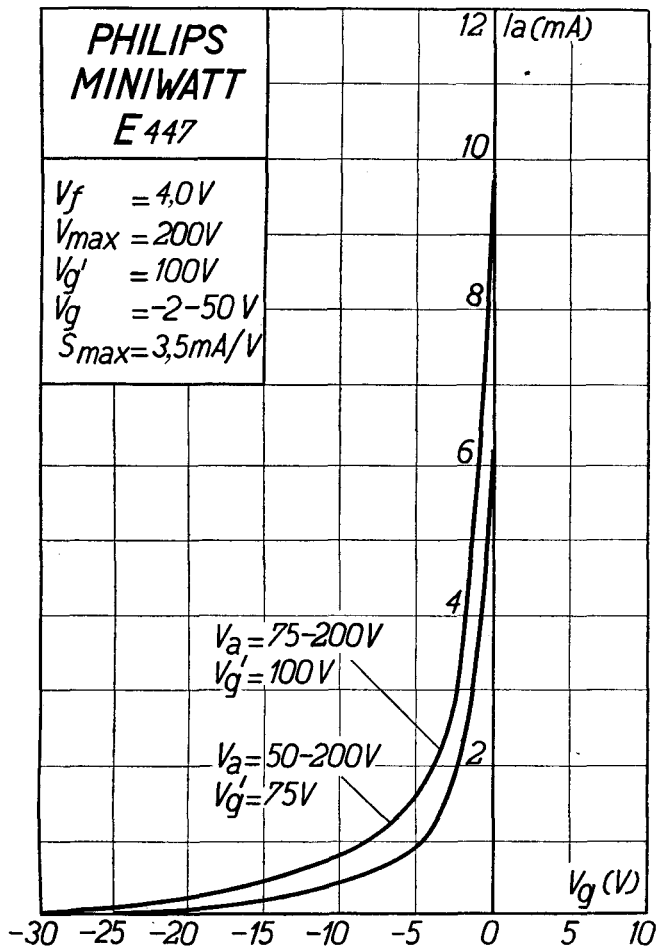

Heizspannung	V_f	= 4,0 V
Tension de chauffage		
Filament voltage		
Heizstrom	I_f	ca.
Courant de chauffage		= env. 1,1 A
Filament current		appr.
Anodenspannung	V_a	= 200 V
Tension anodique		
Anode voltage		
Schirmgitterspannung	V_g^I	= 100 V
Tension de grille-écran		
Screen-grid voltage		
Normaler Anodenstrom		ca.
Courant anodique normal	I_a	= env. 4,5 mA
Normal anode current		appr.
($V_g = -2$ V)		
Normaler Anodenstrom		ca.
Courant anodique normal	I_a	= env. 0,01 mA
Normal anode current		appr.
($V_g = -35$ V)		
Verstärkungsfaktor	$g(k)$	= 2000
Coefficient d'amplification		
Amplification factor		
Steilheit (max.)	$S_{max.}$	= 3,5 mA/V
Inclinaison (max.)		
Slope (max.)		
Steilheit	S	= 2 mA/V
Inclinaison		
Slope		
($V_g = -2$ V)		
Steilheit	S	= 0,005 mA/V
Inclinaison		
Slope		
($V_g = -35$ V)		
Innerer Widerstand (norm.)	R_i	= 1 M. Ohm
Résistance intérieure (norm.)		
Internal resistance (norm.)		
($V_g = -2$ V)		
Innerer Widerstand (norm.)	R_i	> 10 M. Ohm
Résistance intérieure (norm.)		
Internal resistance (norm.)		
($V_g = -35$ V)		
Anoden-Gitterkapazität	C_{ag}	= 0,002 $\mu\mu F$
Capacité grille-plaque		
Anode-grid capacity		
Max. Länge	l	= 138 mm
Longueur max.		
Overall length		
Grösster Durchmesser	d	= 51 m
Diamètre max.		
Max. diameter		
Sockel		= 0 35
Culot		
Base		
Sockelschaltung		= S XVI
Connexion du culot		
Base connection		
Anwendung: H.F.-Verstärkung	Z.F.-Verstärkung	
Applications: Amplification h.f.	Amplification m.f.	
Function: H.F. amplification	I.F. amplification	

**PHILIPS
MINIWATT
E 447**


$V_f = 4,0V$
 $V_{max} = 200V$
 $V_{g'} = 100V$
 $V_g = 2-35V$
 $S_{max} = 3,5mA/V$

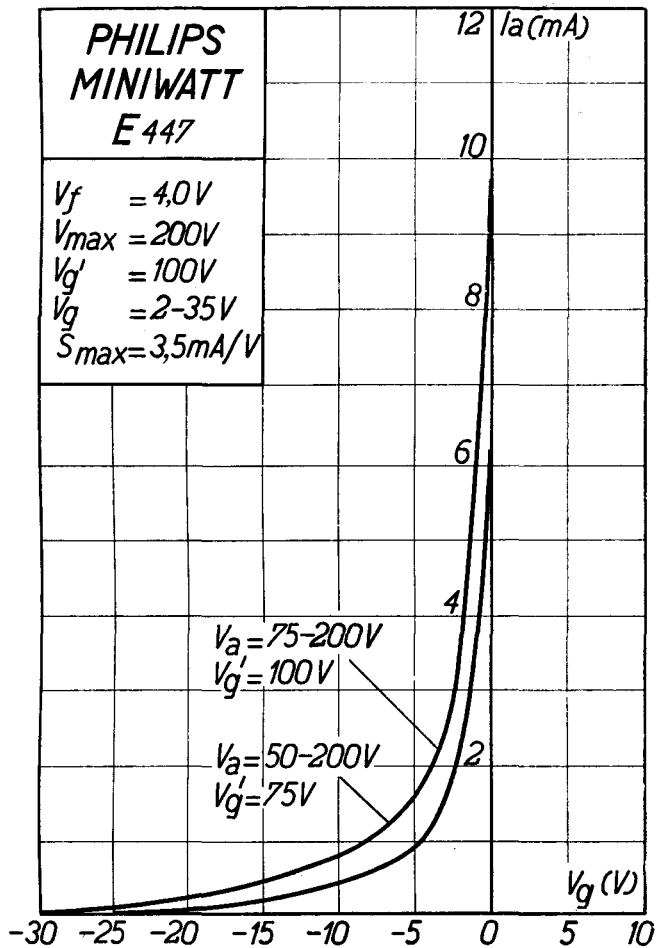


PHILIPS „MINIWATT“

Max. Anodenspannung	V_{ao}	= 400 V
Tension anodique max.	V_{aR}	= 250 V
Max. anode voltage	V_{aL}	= 200 V
Max. Anodenbelastung	W_a	= 1,5 W
Dissipation anodique max.		
Max. anode dissipation		
Max. Kathodenstrom	I_c	= 10 mA
Courant cathodique max.		
Max. cathode current		
Max. Schirmgitterspannung	$V_{g^1}^I$	= 400 V
Tension de grille-écran max.	$V_{g^1}^{I,0}$	= 1,5 x V_a
Max. screen-grid voltage	V_{g^1}	max. 125 V
Max. Schirmgitterbelastung	W_{g^1}	= 0,3 W
Dissipation de grille-écran max.		
Max. screen-grid dissipation		
Mittlerer Schirmgitterstrom	$I_{g^1}^I$	= 1,9 mA
Courant de grille-écran moyen		
Average screen-grid current		
Ungefähre Grenzw. des Schirmgitterstr.	$I_{g^1}^I$ min.	= 1,3 mA
Limites approxim. du cour. de gr. écran	$I_{g^1}^I$ max.	= 2,5 mA
Approx. limits of screen-grid current		
Gitterstrom-Einsatzpunkt	V_{gi}	= -1,3 V
Point de commenc. du courant de grille		
Starting point of grid current		
Max. Widerstand im Gitterkreis	R_{g1}	= 4 M. Ohm
Résistance max. dans le circuit de grille		
Max. resistance in grid circuit		
Max. Spann. zwischen Faden und Kath.	V_{fc}	= 80 V
Tension max. entre filament et cathode		
Max. voltage between filam. and cathode		
Max. Widerst. zwischen Faden und Kath.	R_{fc}	= 20000 Ohm
Résist. max. entre filament et cathode		
Max. resist. betw. filament and cathode		
Kapazitäten	C_g	= 12,5 $\mu\mu\text{F}$
Capacités	C_u	= 10,2 $\mu\mu\text{F}$
Capacities	C_{ag}	$\leq 0,006 \mu\mu\text{F}$

I_a (mA)

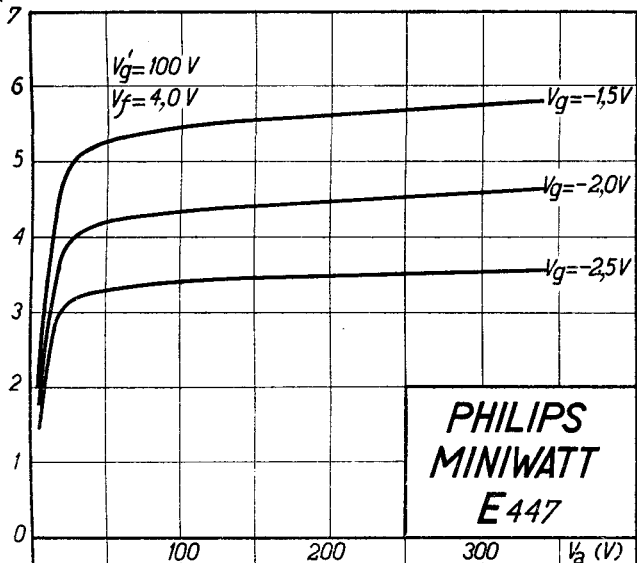

**PHILIPS
MINI WATT
E 447**

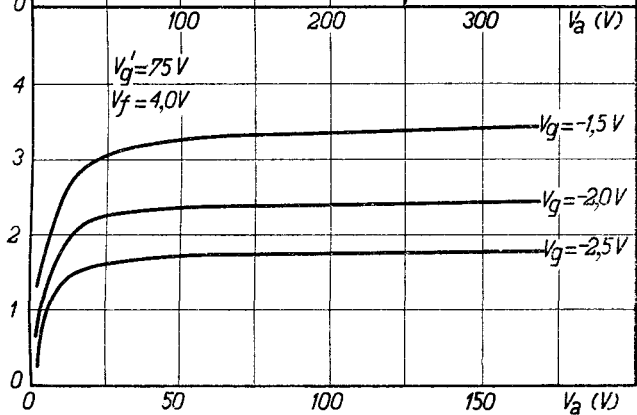

PHILIPS „MINIWATT“

Max. Anodenspannung	V^{ao}	= 400 V
Tension anodique max.	V^{aR}	= 250 V
Max. anode voltage	V^{aL}	= 200 V
Max. Anodenbelastung		
Dissipation anodique max.	W_a	= 1,5 W
Max. anode dissipation		
Max. Kathodenstrom		
Courant cathodique max.	I_c	= 10 mA
Max. cathode current		
Max. Schirmgitterspannung	$V_g^{'} o$	= 400 V
Tension de grille-écran max.	$V_g^{'} o$	= 1,5 x V_a
Max. screen-grid voltage	$V_g^{'} o$	max. 150 V
Max. Schirmgitterbelastung		
Dissipation de grille-écran max.	$W_g^{'} o$	= 0,3 W
Max. screen-grid dissipation		
Mittlerer Schirmgitterstrom		
Courant de grille-écran moyen	$I_g^{'} o$	= 1,8 mA
Average screen-grid current		
Ungefähre Grenzw. des Schirmgitterstr.	$I_g^{'} o \text{ min.}$	= 1 mA
Limites approxim. du cour. de gr.-écran	$I_g^{'} o \text{ max.}$	= 2,6 mA
Approx. limits of screen-grid current		
Gitterstrom-Einsatzpunkt		
Point de commenc. du courant de grille	V_{gi}	= -1,3 V
Starting point of grid current		
Max. Widerstand im Gitterkreis		
Résistance max. dans le circuit de grille	R_{g1}	= 4 M. Ohm
Max. resistance in grid circuit		
Max. Spann. zwischen Faden und Kath.		
Tension max. entre filament et cathode	V_{fc}	= 80 V
Max. voltage between filam. and cathode		
Max. Widerst. zwischen Faden und Kath.		
Résist. max. entre filament et cathode	R_{fc}	= 20000 Ohm
Max. resist. betw. filament and cathode		
Kapazitäten	C_g	= 12,5 $\mu\mu\text{F}$
Capacités	C_a	= 9,9 $\mu\mu\text{F}$
Capacities	C_{ag}	= 0,002 $\mu\mu\text{F}$

I_a (mA)

