
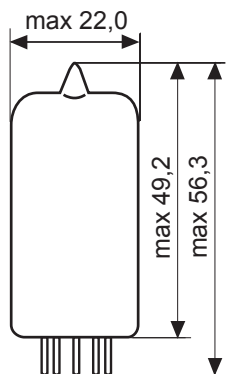


E88CC

6922

R. F. DOUBLE TRIODE



Base: NOVAL

$$U_f = 6,3 \text{ V}$$

$$I_f = 300 \text{ mA}$$

Typical Characteristics:

$$U_a = 90 \text{ V}$$

$$U_g = -1,3 \text{ V}$$

$$I_a = 15 \text{ mA}$$

$$S = 12,5 \text{ mA/V}$$

$$R_i = 2,6 \text{ k}\Omega$$

$$\mu = 33$$

Limiting Values:

$$U_{a0} = 550 \text{ V}$$

$$U_a(I_a=0) = 400 \text{ V}$$

$$U_a = 220 \text{ V}$$

$$U_a(W_{ar}<0,8 \text{ W}) = 250 \text{ V}$$

$$W_{aR} = 1,5 \text{ W}$$

$$W_{g1R} = 0,03 \text{ W}$$

$$I_k = 20 \text{ mA}$$

$$U_g = -100 \text{ V}$$

$$R_g = 1 \text{ M}\Omega$$

$$U_{+k/f-} = 120 \text{ V}$$

$$U_{-k/f+} = 60 \text{ V}$$

$$R_{k/f} = 20 \text{ k}\Omega$$

Capacitances:

system I. system II.

$$C_{g/k} = 3,1 \quad 3,1 \text{ pF}$$

$$C_a = 0,18 \quad 0,18 \text{ pF}$$

$$C_{g/a} = 1,4 \quad 1,4 \text{ pF}$$



TRANSFER CHARACTERISTICS

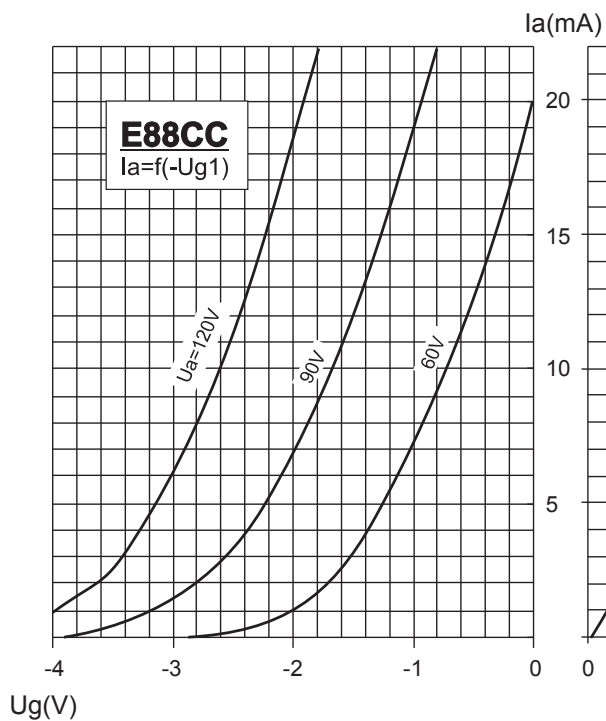


PLATE CHARACTERISTICS

