

## DIODE

Heating : indirect by A.C. or D.C.  
parallel supply

Chauffage : indirect par C.A. ou C.C.  
alimentation- parallèle

Heizung : indirekt durch Wechsel-  
oder Gleichstrom; Parallel-  
speisung


$V_f = 6,3 \text{ V}$

$I_f = 0,15 \text{ A}$

Dimensions in mm

Dimensions en mm

Abmessungen in mm



Capacitance

Capacités

Kapazitäten


$C_{dk} = 2,1 \text{ pF}$

Limiting values

Caractéristiques limites

Grenzdaten

|                     |        |        |
|---------------------|--------|--------|
| $V_d \text{ inv}_p$ | = max. | 560° V |
| $I_d$               | = max. | 5 mA   |
| $I_{dp}$            | = max. | 30 mA  |
| $V_{kf}$            | = max. | 100 V  |
| $R_{kf}$            | = max. | 20 kΩ  |

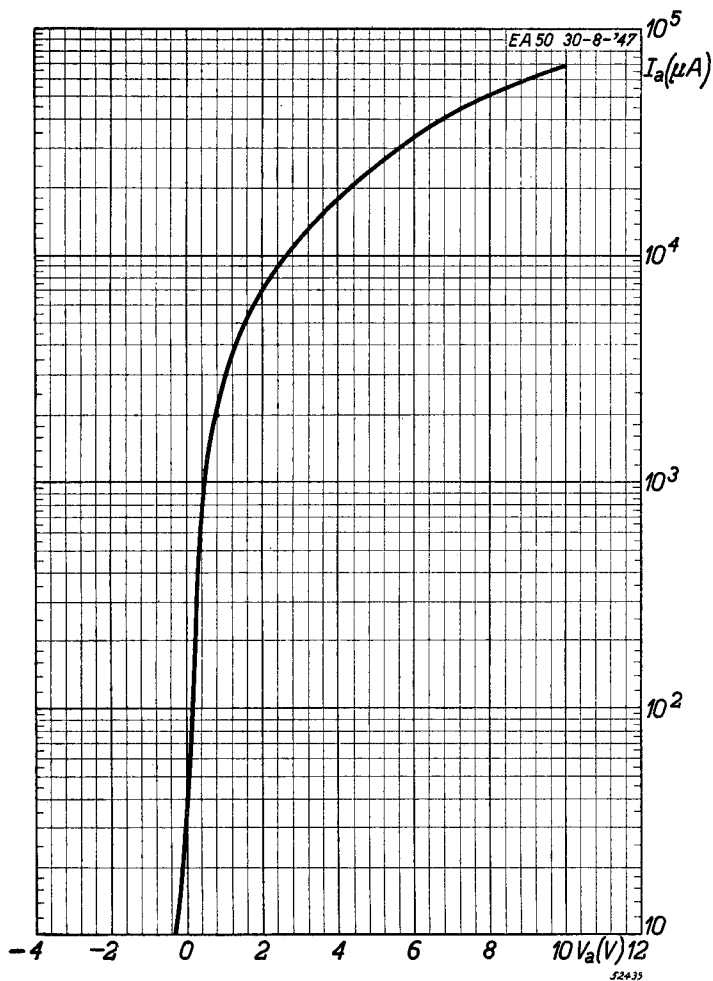**EA 50****PHILIPS**



|      | EA50  |            |
|------|-------|------------|
| page | sheet | date       |
| 1    | 1     | 1953.11.11 |
| 2    | A     | 1953.11.11 |
| 3    | FP    | 1999.04.10 |