

DOUBLE TRIODE

ECC35

High-gain double triode with separate cathodes for use in paraphase A.F. voltage amplifiers.

HEATER

V_h	6.3	V
I_h	0.4	A

CAPACITANCES

$ca'-a''$	0.75	μuF
$ca'-g'$	2.5	μuF
cin'	3.0	μuF
c_{out}'	1.0	μuF
$ca''-g''$	3.0	μuF
cin''	3.0	μuF
c_{out}''	1.3	μuF

CHARACTERISTICS

V_a	250	V
V_g	-2.5	V
I_a	2.3	mA
ξ_m	2.0	mA/V
u	68	
r_a	34,000	ohms

LIMITING VALUES

$V_a(b) \max$	550	V
$V_a \max$	300	V
$W_a \max$	1.5	W
$I_k \max$	8.0	mA
$R_g \max$	1.5	M.ohms
$V_{h-k} \max$	90	V



ECC35

DOUBLE TRIODE

High-gain double triode with separate cathodes for use in paraphase A.F. voltage amplifiers.



OPERATING CONDITIONS AS R.C. COUPLED AUDIO AMPLIFIER

V_b	R_a	I_a	R_k	$\frac{V_{out}}{V_{in}}$	V_{out}^*	V_{out}^ϕ	D_{tot}	$R_{g1}^\#$
(V)	(MΩ)	(mA)	(ohms)		(V)	(V)	(%)	(MΩ)
400	.1	1.3	2700	40.5	37.5	66.2	10	.33
350	.1	1.1	2700	40.5	32.2	57.0	10	.33
300	.1	1.0	2700	40	28.0	48.7	10	.33
250	.1	0.8	2700	40	23.2	41.1	10	.33
200	.1	0.65	2700	39.5	18.7	28.5	8	.33
400	.22	0.73	4700	46	44	80	10	.68
350	.22	0.63	4700	45.5	38	69.3	10	.68
300	.22	0.53	4700	45.5	32.5	59	10	.68
250	.22	0.45	4700	45	27	43	8.5	.68
200	.22	0.38	4700	45	21.5	33.6	8.2	.68

- * at $D_{tot} = 5\%$
 ϕ at $D_{tot} = 10\%$ or start of I_g
 $\#$ grid resistance of following valve.

DIMENSIONS


ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

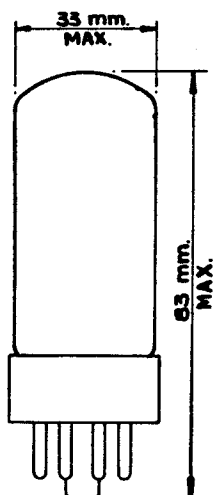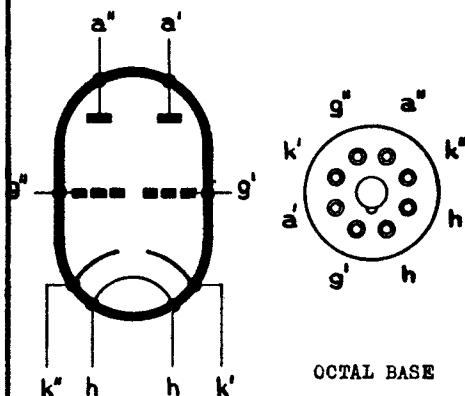

DOUBLE TRIODE

ECC35

High-gain double triode with separate cathodes for use in paraphase A.F. voltage amplifiers.

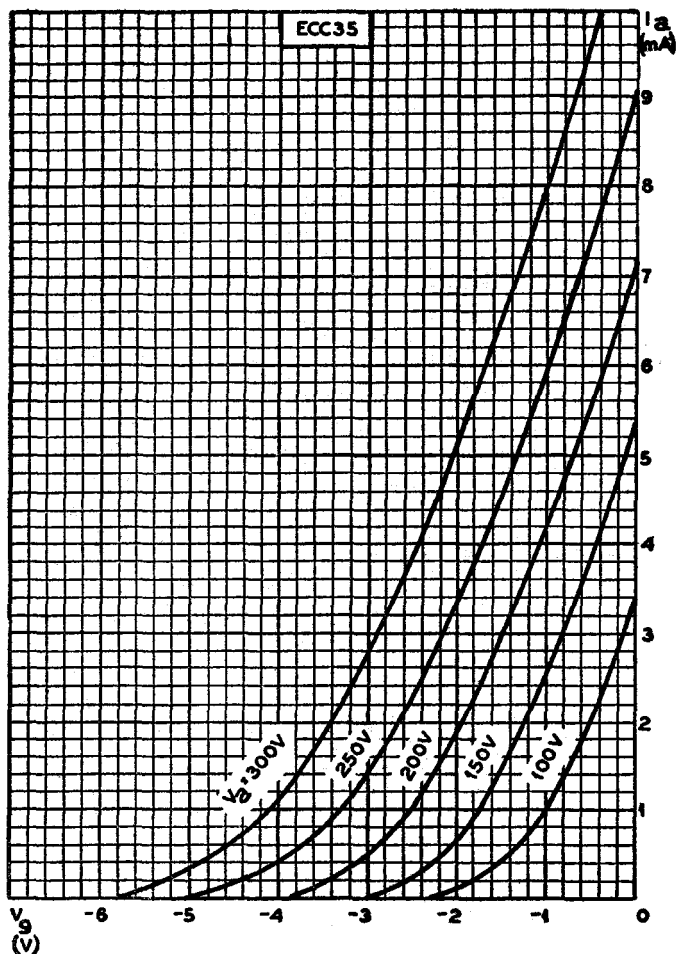

ECC35

DOUBLE TRIODE

High-gain double triode with separate cathodes for use in paraphase A.F. voltage amplifiers.

