


V.H.F. TRIODE PENTODE



† B9A Base

GENERAL

This triode and variable mu pentode valve combination, with the pentode of frame grid construction, is for use in television tuners. It is primarily intended to be used as a variable gain V.H.F. frequency changer with the triode as local oscillator but the pentode is also designed for use as a high gain controlled I.F. amplifier following a U.H.F. tuner.

Heater Voltage	V_h	6.3	V
Heater Current	I_h	0.35	A

RATINGS

	Pentode	Triode	
Maximum Anode Dissipation	$P_a(\max)$	2	W
Maximum Screen Grid Dissipation	$P_{g2}(\max)$	0.5	W
Maximum Anode Voltage	$V_a(\max)$	250	V
Maximum Screen Grid Voltage	$V_{g2}(\max)$	230	V
Maximum Heater to Cathode Voltage (D.C.)	$V_{h-k}(\max)$	150	V
Maximum Cathode Current	$I_k(\max)$	18	mA
Maximum Grid to Cathode Resistance (Fixed Bias)	$R_{g1-k}(\max)$	250	500 k Ω

INTER-ELECTRODE CAPACITANCES

	*	†	‡	
Grid 1 to all	C_{g1-all}	6.7	7.1	8.2 pF
Anode Pentode to all	C_{ap-all}	2.7	3.1	4.2 pF
Grid 1 to Anode Pentode	C_{g1-ap}	0.007	0.008	0.009 pF
Anode Triode to Earth	C_{at-E}	2.2	2.5	3.5 pF
Grid Triode to Earth	C_{gt-E}	2.4	2.7	3.7 pF
Anode Pentode to Grid Triode	C_{ap-gt}	0.001	0.003	0.005 pF
Grid Triode to Anode Triode	C_{gt-at}	2.0	2.05	2.1 pF
Anode Pentode to Anode Triode	C_{ap-at}	0.014	0.027	0.046 pF
Grid 1 to Grid Triode	C_{g1-gt}	0.008	0.018	0.037 pF
Grid 1 to Anode Triode	C_{g1-at}	0.002	0.004	0.006 pF

* In fully-shielded socket with can (I.E.C. Publication 100).

† With holder capacitance balanced out but with can. (Holder as below).

‡ Total capacitance including B9A ceramic holder with skirt and screening can (Plessey holder type CP180024/3).

"Earth" denotes the electrodes of the other section and the remaining earthy potential electrodes of the section under measurement, heater and shields joined to cathode.

CHARACTERISTICS

	Pentode	Triode	
Anode Voltage	V_a	125	100 V
Screen Grid Voltage	V_{g2}	125	— V
Control Grid Voltage	V_{g1}	-1.5	-3 V
Anode Current	I_a	10	14 mA
Screen Grid Current	I_{g2}	3.1	— mA
Mutual Conductance	g_m	11	5.5 mA/V
Amplification Factor	μ	—	17
Inner Amplification Factor	μ_{g1-g2}	50	—

† Shield completely surrounds pentode.

Basing arranged to minimise pentode cathode lead inductance effects with the shorter lead to pin 8.

TYPICAL OPERATION AS FREQUENCY CHANGER AND I.F. AMPLIFIER

Grid current bias operation with A.G.C. Oscillator voltage injected into grid 1.

Pentode


		F.C.	I.F.*	
Frequency	f	200	36	Mc/s
Supply Voltage	V_b	200	200	V
Anode Voltage (Decoupling Resistance, $R_a=5.6k\Omega$) (approx)	V_a	155	125	V
Screen Grid Voltage ($R_{g2}=27k\Omega$) (approx)	V_{g2}	135	92	V
Current through Grid 1 resistance $R_{g1'}$ ($R_{g1'}=2.2M\Omega$)	I_{g1}	1.3	0.3	μA
Anode Current (approx)	I_a	7.8	13.2	mA
Screen Grid Current (approx)	I_{g2}	2.4	4.0	mA
D.C. Voltage on Pentode Control Grid at maximum gain		-3.0	—	V
Conversion Conductance at 1 Mc/s (V_b, R_a, R_{g1}, R_{g2} as above)	g_c	4.7	—	mA/V
Grid Voltage for Conversion Conductance reduction 10 : 1	$V_{g1(gc/10)}$	-6.8	—	V
Mutual Conductance (V_b, R_a, R_{g1}, R_{g2} as above)	g_m	—	15.2	mA/V
Grid Voltage for Mutual Conductance reduction 10 : 1	$V_{g1(gm/10)}$	—	-5.0	V
Grid Voltage for Mutual Conductance reduction 100 : 1	$V_{g1(gm/100)}$	—	-6.8	V
Valve Input Resistance (Anode short circuited)	r_{g1}	—	9	k Ω
Working Input Capacitance	$C_{in(w)}$	—	11†	pF
Change in Input Capacitance by biasing valve to cut-off	$\Delta C_{in(w)}$	—	2.8	pF

Triode

Anode Voltage	V_a	77	V
Anode Current	I_a	7.8	mA
Rectified Grid Voltage (Grid Resistance= $47k\Omega$)	V_g	6.5	V

* Supply voltage removed from triode.

† With holder capacitance balanced out but with can.

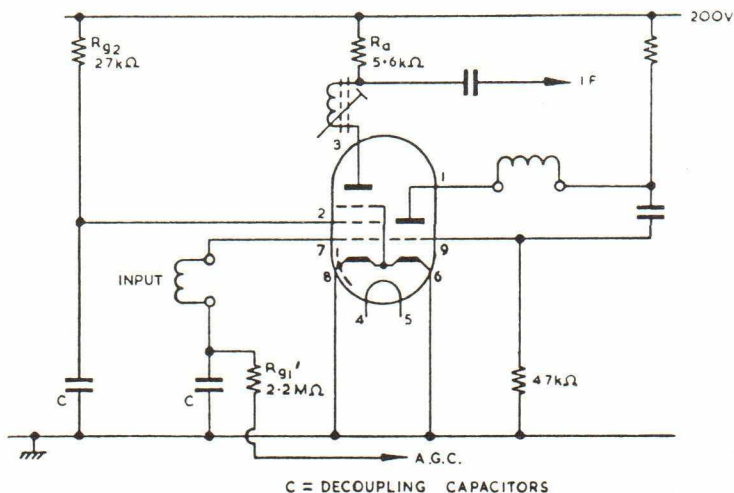

TYPICAL OPERATION AS FREQUENCY CHANGER AND I.F. AMPLIFIER

Partial grid current bias can be used for the frequency changer operation when a rectified voltage of greater than 8V d.c. is available from the triode grid resistor. This reduces the delay in the initial $V_{a.g.c.}/g_c$ characteristic. The heterodyne voltage is injected into grid 1.

Pentode


	F.C.	I.F.*	
Frequency	f 200	36	Mc/s
Supply Voltage	V_b 200	200	V
Anode Voltage (Decoupling Resistance, $R_a=5.6k\Omega$) approx	V_a 160	125	V
Screen Grid Voltage ($R_{g2}=27k\Omega$) approx	V_{g2} 140	92	V
Current through resistance $R_{g1'}$ ($R_{g1'}=2.2M\Omega$)		1.6	μA
Resistance to provide Bias from Triode Grid	$R_{g1''}$ 8.2	8.2	$M\Omega$
Anode Current (approx)	I_a 7.0	13.2	mA
Screen Grid Current (approx)	I_{g2} 2.2	4.0	mA
D.C. Voltage on Pentode Control Grid at maximum gain		-3.5	V
Conversion Conductance at 1 Mc/s (V_b, R_a, R_{g1}, R_{g2} as above)	g_c 4.7	—	mA/V
Grid Voltage for Conversion Conductance reduction 10 : 1	$V_{g1(gc/10)}$ -5.8	—	V
Mutual Conductance (V_b, R_a, R_{g1}, R_{g2} as above)	g_m —	15.2	mA/V
Grid Voltage for Mutual Conductance reduction 10 : 1	$V_{g1(gm/10)}$ —	-6.2	V
Grid Voltage for Mutual Conductance reduction 100 : 1	$V_{g1(gm/100)}$ —	-8.5	V
Valve Input Resistance (Anode short circuited)	r_{g1} —	9	$k\Omega$
Working Input Capacitance	$C_{in(w)}$ —	11†	pF
Change in Input Capacitance by biasing valve to cut-off	$\Delta C_{in(w)}$ —	2.8	pF

Triode

Anode Voltage	V_a 110	V
Anode Current	I_a 10.5	mA
Rectified Grid Voltage (Grid Resistance= $47k\Omega$)	V_g 11	V

* Supply voltage removed from triode.

† With holder capacitance balanced out but with can.

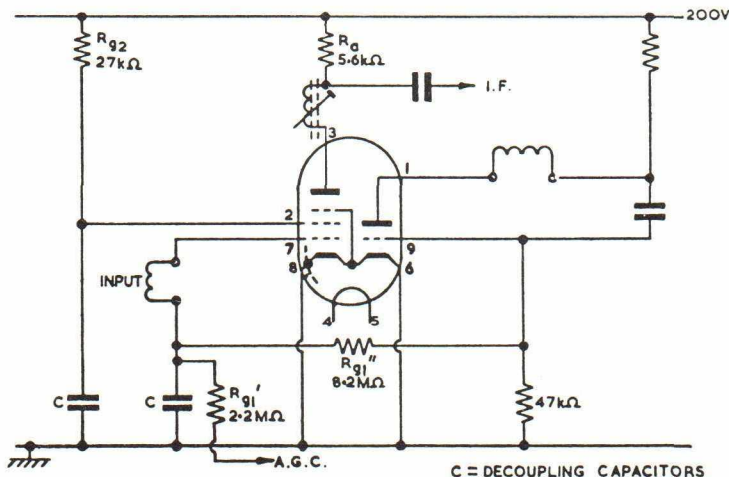

MOUNTING POSITION—Unrestricted

The characteristic curves for the
6C18 ECF805 are identical to
those given for 30C18 PCF805.