

DUAL CONTROL HEPTODE for television service
HEPTODE A DOUBLE COMMANDE pour le service de télévision
DOPPELGESTEUERTE HEPTODE für Fernsehbetrieb

Heating : indirect by A.C. or D.C.;
series or parallel supply

Chauffage: indirect par C.A. ou C.C.;
alimentation série ou pa-
rallèle

Heizung : indirekt durch Wechsel-
oder Gleichstrom; Serien-
oder Parallelspeisung



$$V_f = 6,3 \text{ V}$$

$$I_f = 300 \text{ mA}$$

Dimensions in mm

Dimensions en mm

Abmessungen in mm



Base, culot, Sockel: MINIATURE

Capacitances

Capacités

Kapazitäten

$$C_{ag1} < 0,07 \text{ pF}$$

$$C_{ag3} < 0,36 \text{ pF}$$

$$C_{g1-} (k+f+g2+g3+g4+g5) = 5,5 \text{ pF}$$

$$C_{g3-} (k+f+g1+g2+g4+g5) = 7,0 \text{ pF}$$

$$C_{a-} (k+f+g1+g2+g3+g4+g5) = 7,5 \text{ pF}$$

$$C_{g1g3} < 0,22 \text{ pF}$$

Operating characteristics
Caractéristiques d'utilisation
Betriebsdaten


V_a	=	10	100	100 V
V_{g2+g4}	=	30	30	30 V
V_{g1}	=	0	0	-1 V
V_{g3}	=	0	-1	0 V
I_a	=	2	0,8	0,75 mA
I_{g2+g4}	=	3,5	4,0	1,1 mA
S_{g1}	=	-	-	1,2 mA/V
S_{g3}	=	-	1,55	- mA/V
R_i	=	-	0,4	0,9 M Ω
V_{g1} ($I_a=50 \mu A$)	=	-	-	-2,5 V
V_{g3} ($I_a=50 \mu A$)	=	-	-2,2	- V

Limiting values
Caractéristiques limites
Grenzdaten

V_{a0}	= max.	550 V
V_a	= max.	300 V
W_a	= max.	1,0 W
$V_{(g2+g4)0}$	= max.	550 V
$V_{b(g2+g4)}$	= max.	300 V
V_{g2+g4}	= max.	100 V
W_{g2+g4}	= max.	1,0 W
I_k	= max.	14 mA
R_{g1}	= max.	0,47 M Ω
R_{g3}	= max.	2,2 M Ω
R_{g3} ($V_{g2+g4} \leq 30$ V)	= max.	5 M Ω
V_{kf} (k pos.; f neg.)	= max.	200 V
V_{kf} (k neg.; f pos.)	= max.	100 V

PHILIPS

EH 90

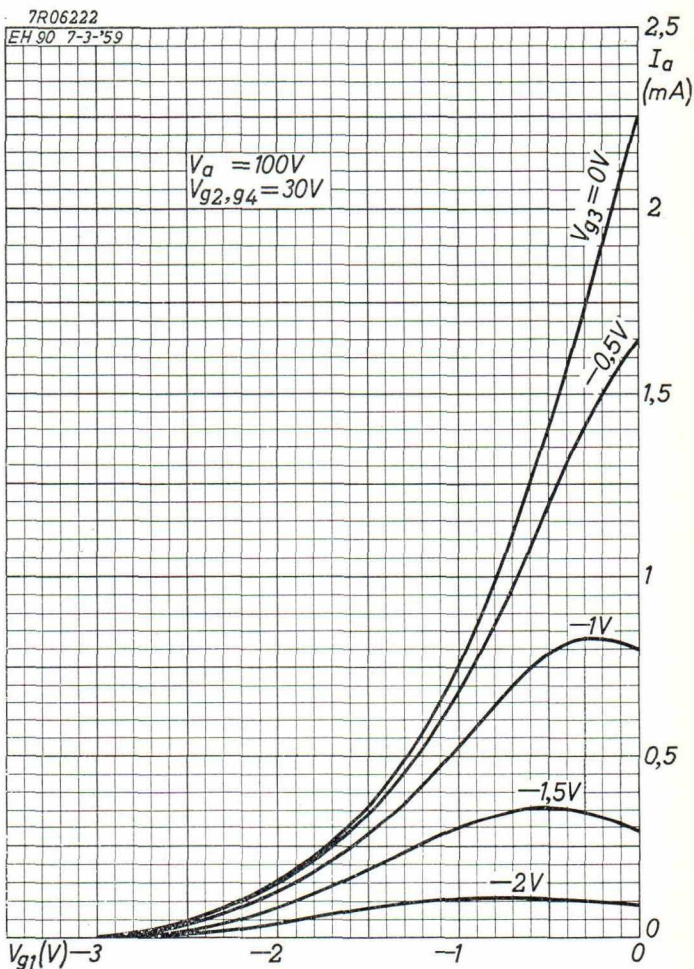

3. 3. 1959


A

EH 90

PHILIPS

7R06223

EH 90 7-3-'59

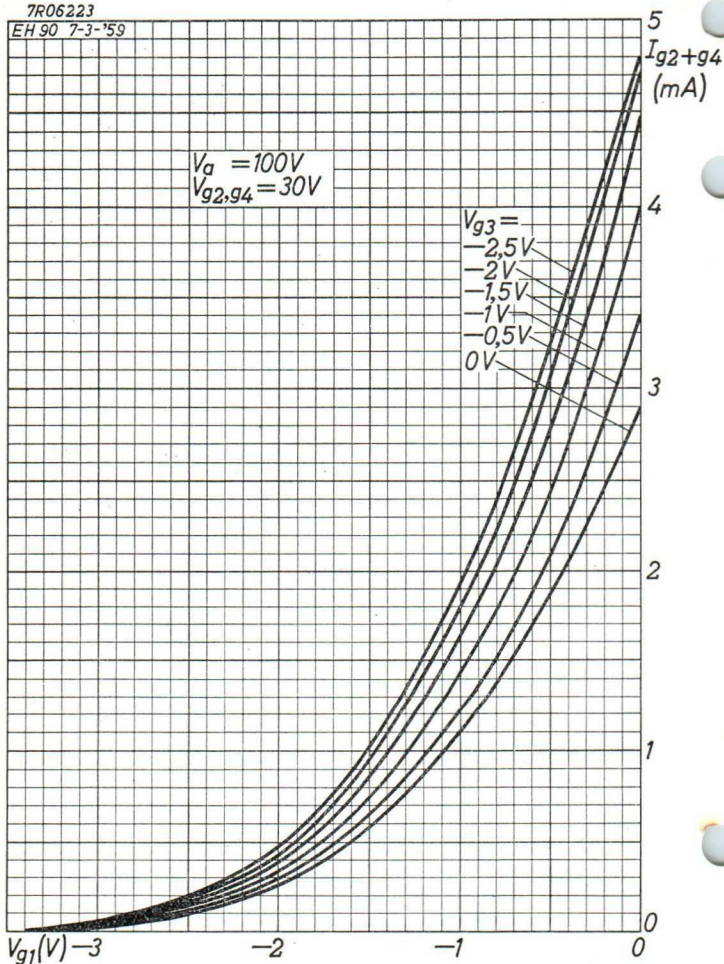


B

PHILIPS

EH 90

7R06224

EH90 7-3-59

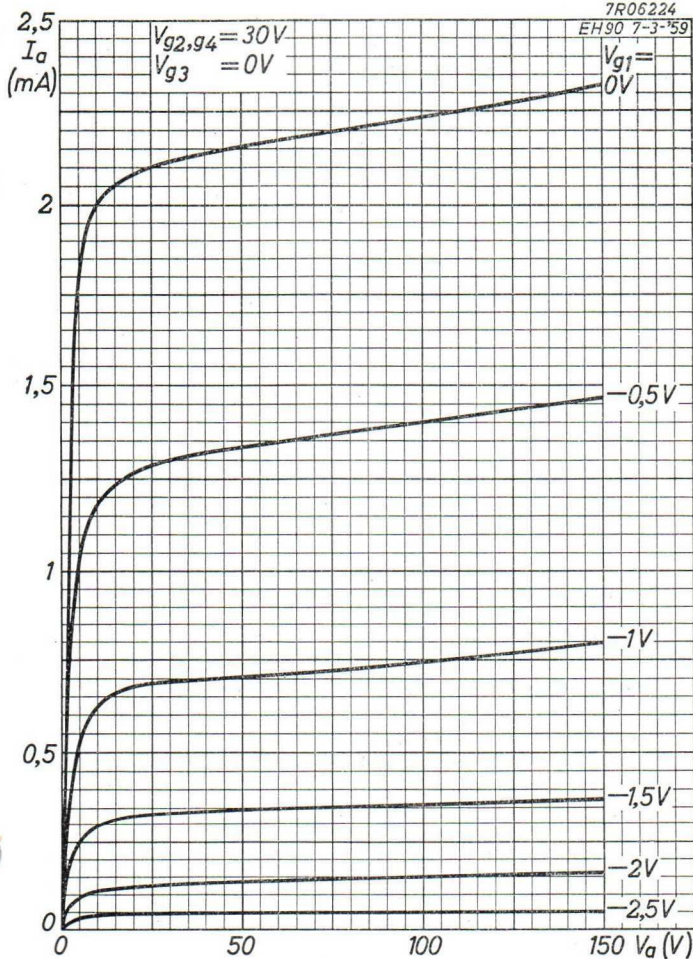


3.3.1959

C

EH90**PHILIPS**


7R06225

EH90 7-3-'59

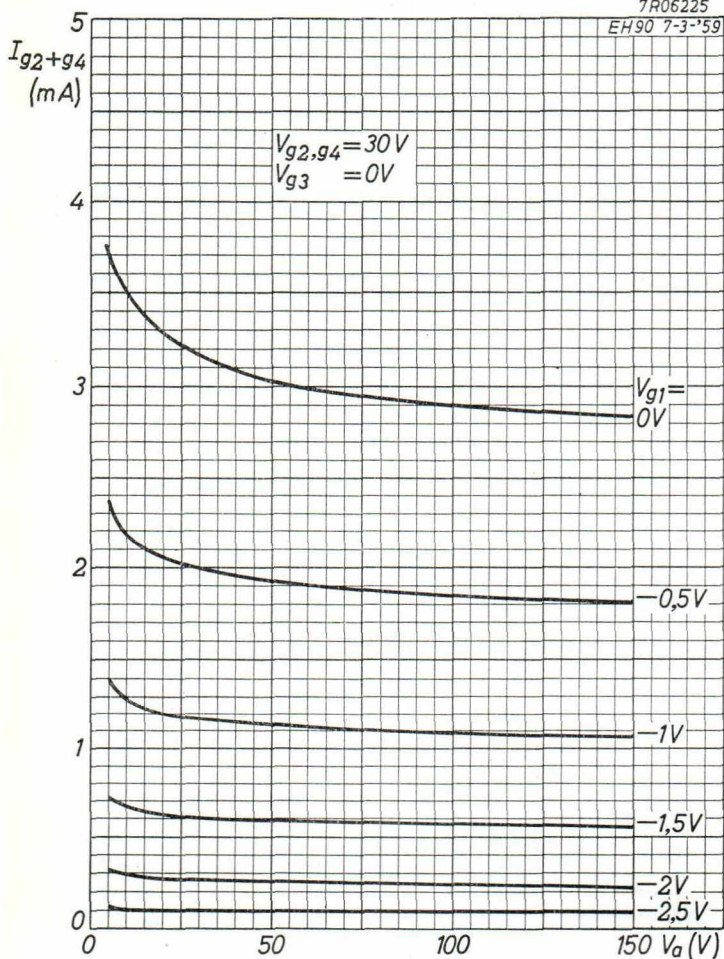


PHILIPS

EH 90

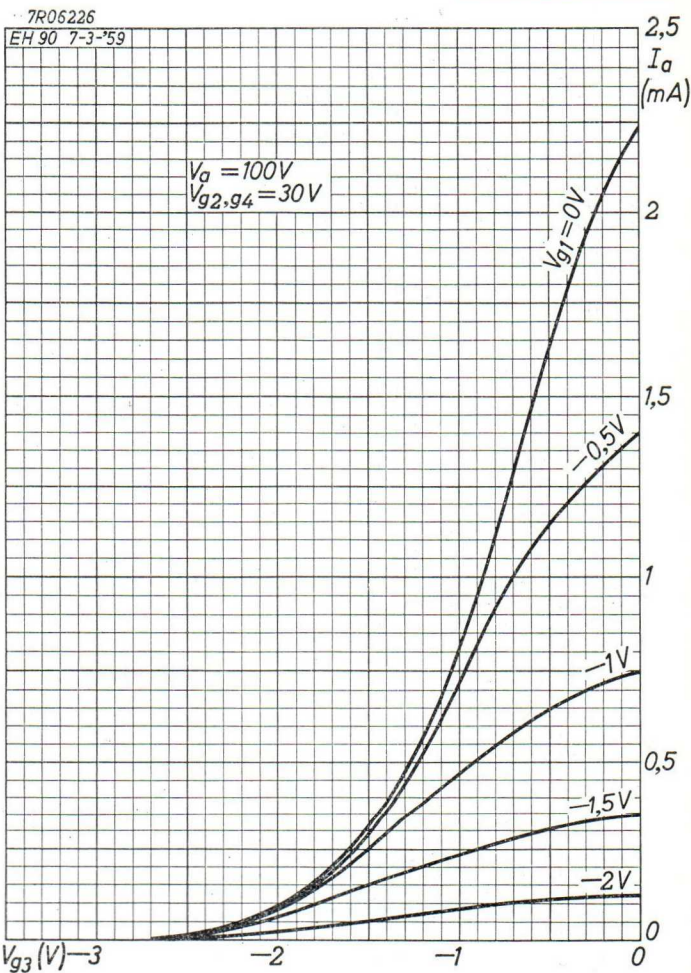

3.3.1959

E

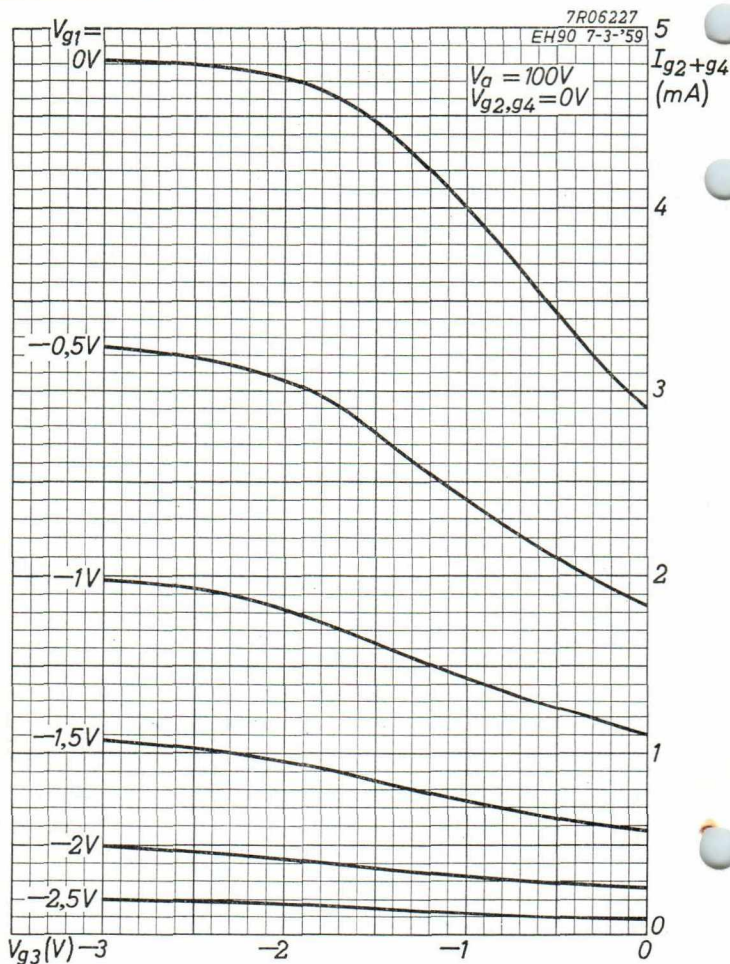
EH90**PHILIPS**

PHILIPS

EH90

7R06228

EH90 7-3-'59

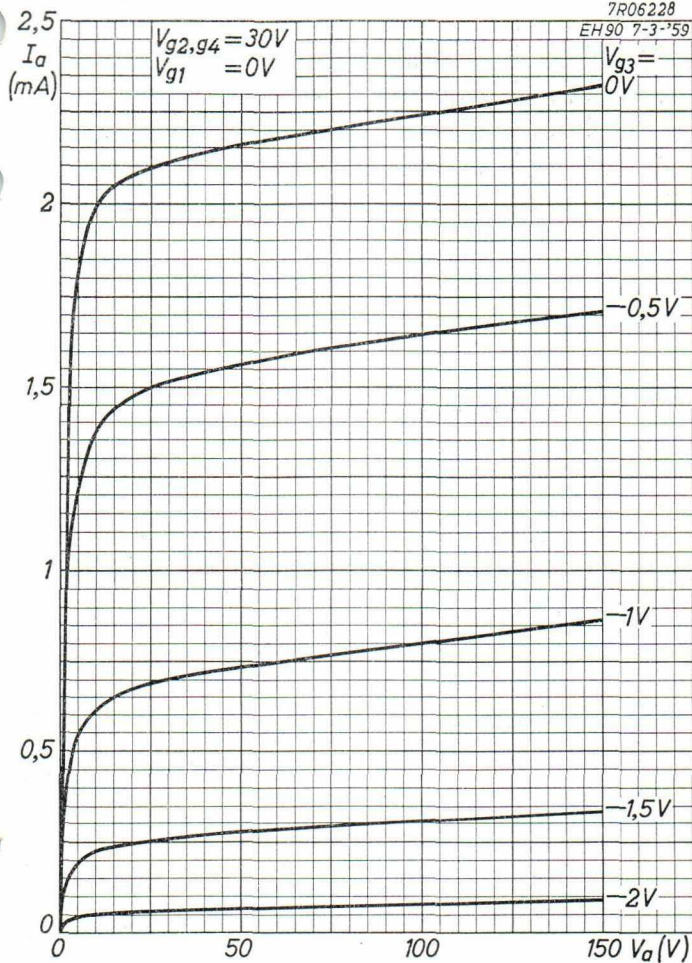

3.3.1959

G

EH90**PHILIPS**

7R06229

EH90 7-3-59

