

EDISWAN

ESU.450

HIGH VACUUM HALF-WAVE RECTIFIER**RATING**

Filament Voltage (volts)	V_f	17.0
Filament Current (amps)	I_f	6.6
Maximum Anode Voltage (volts)	$V_a(\max)$	1,000
Maximum Peak Inverse Anode Voltage (volts)	P.I.V.(max)	20,000
Maximum Peak Anode Current (amps)	$I_a(pk)\max$	0.4
Maximum Anode Dissipation (watts)	$P_a(\max)$	450


DIMENSIONS

Maximum Overall Length (mm)	345
Maximum Diameter (mm)	160
Approximate Nett Weight (ozs)	18
Approximate Packed Weight (lbs)	8
Approximate Packed Export Weight (lbs)	9

MOUNTING POSITION - Vertical

EDISWAN
ESU.450
HIGH VACUUM HALF-WAVE RECTIFIER

ESU.450

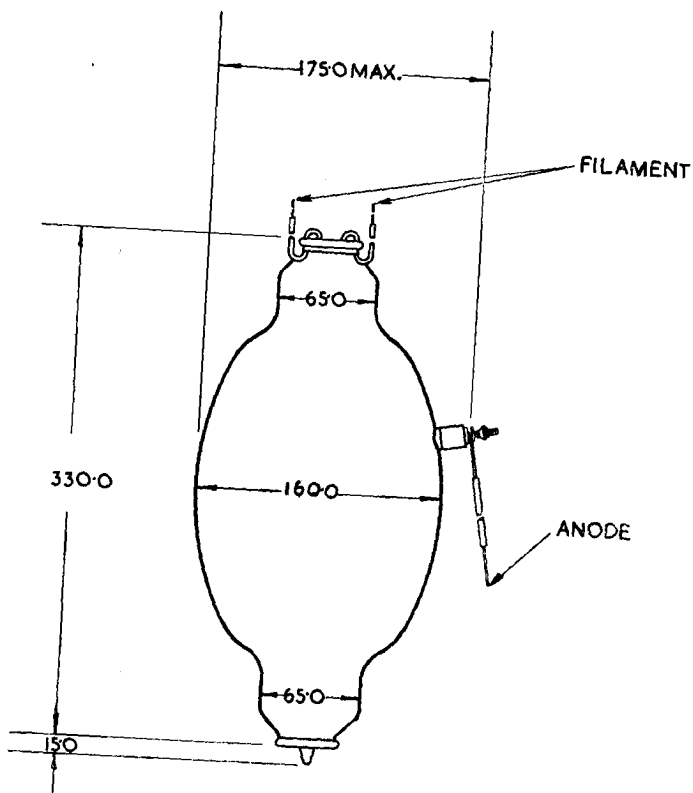

ALL DIMS. IN m.m. UNLESS
STATED OTHERWISE

October 1948

RADIO DIVISION

Issue 1/5

THE EDISON SWAN ELECTRIC COMPANY LTD.