



ESV1500

VAPOUR COOLED TRIODE

GENERAL

The ESV1500 is a Vapour Cooled Triode, having a directly heated thoriated tungsten filament. It has a maximum anode dissipation of 5 kW and a maximum anode voltage rating of 8 kV, the maximum operating frequency at full rating being 10 Mc/s.

RATING

Filament Voltage	(volts)	V_f	8.0
Filament Current	(amps)	I_f	26.0
Maximum Anode Voltage	(kV)	$V_{a(max)}$	8.0
Maximum Anode Dissipation	(kW)	$P_{a(max)}$	5.0
Maximum Filament Emission (Peak)	(amps)	$I_{k(max)pk.}$	8.0
Maximum Grid Dissipation	(watts)	$P_{g(max)}$	150
Mutual Conductance	(mA/V)	g_m	7.5
Amplification Factor		μ	24
Anode Impedance	(ohms)	r_a	3,200
Maximum Operating Frequency (Full Rating)	(Mc/s)	$f_{(max)}$	40
Maximum Operating Frequency (Reduced Rating)	(Mc/s)	$f_{(max)abs.}$	80
Maximum R.F. Power Output	(kW)	P_{out}	8.0

INTER-ELECTRODE CAPACITANCES (pF)

Anode/Grid	C_{a-g}	11
Anode/Filament	C_{a-f}	1
Grid/Filament	C_{g-f}	15



ESV1500
VAPOUR COOLED TRIODE


DIMENSIONS

Maximum Overall Length	(ins)	9 $\frac{1}{2}$
Maximum Diameter	(ins)	4 $\frac{1}{2}$
Approximate Nett Weight	(lbs)	10
Approximate Packed Weight	(lbs)	47

OPERATION

See "Application Notes on the use of Vapour Cooled Valves"

ESV1500
VAPOUR COOLED TRIODE

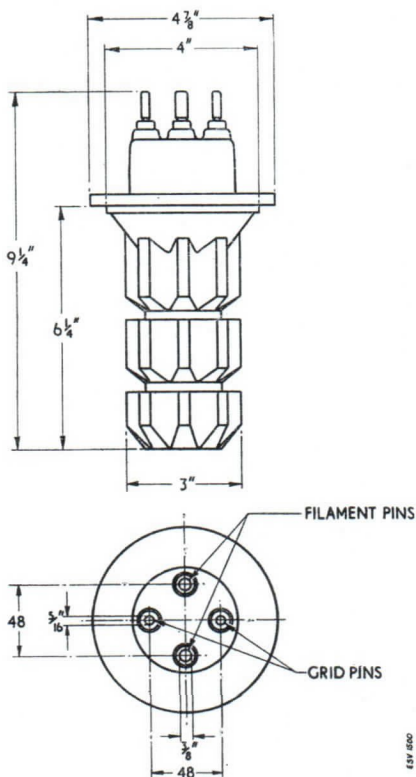

All dimensions in mm unless otherwise stated

ESV1500



EDISWAN

ESV1500
VAPOR COOLED TRIODE



As shown in two views above.

Associated Electrical Industries Limited
Electronic Components Division
The Millers Way
Widnes, Cheshire, England
L35 9DF
Tel: 051 475 1111