

FEDERAL POWER TRIODE

Type F-6399

6 Kilowatts Plate Dissipation



GENERAL DATA

DESCRIPTION:

Federal's Type F-6399 is a three-electrode tube designed for use as an industrial oscillator. The relatively wide spacing between the elements, and the lack of internal insulators make this type tube especially suitable for industrial applications. The anode is water-cooled with an integral water jacket, capable of dissipating 6 kilowatts. The cathode is a thoriated tungsten filament. Maximum ratings apply up to 30 megacycles. Operation up to 50 megacycles is permissible at reduced ratings.


Electrical:

► Filament Voltage*	11 Volts
► Filament Current	29 Amperes
► Amplification Factor, $E_c = -200 \text{ V}, I_b = 0.2 \text{ A}$	25
► Interelectrode Capacitances	
Grid-Plate	11.5 μf
Grid-Filament	13.8 μf
Plate-Filament	1.7 μf

*Full rated voltage may be safely applied to the cold filament.

Mechanical:

► Mounting Position— Vertical, Anode Down	
► Type of Cooling—Water	
Water Flow	3.5 GPM
Max. Outgoing water Temperature	70° C
Maximum Glass Temperature	150° C
► Net Weight, Approximate	1 1/4 Pounds

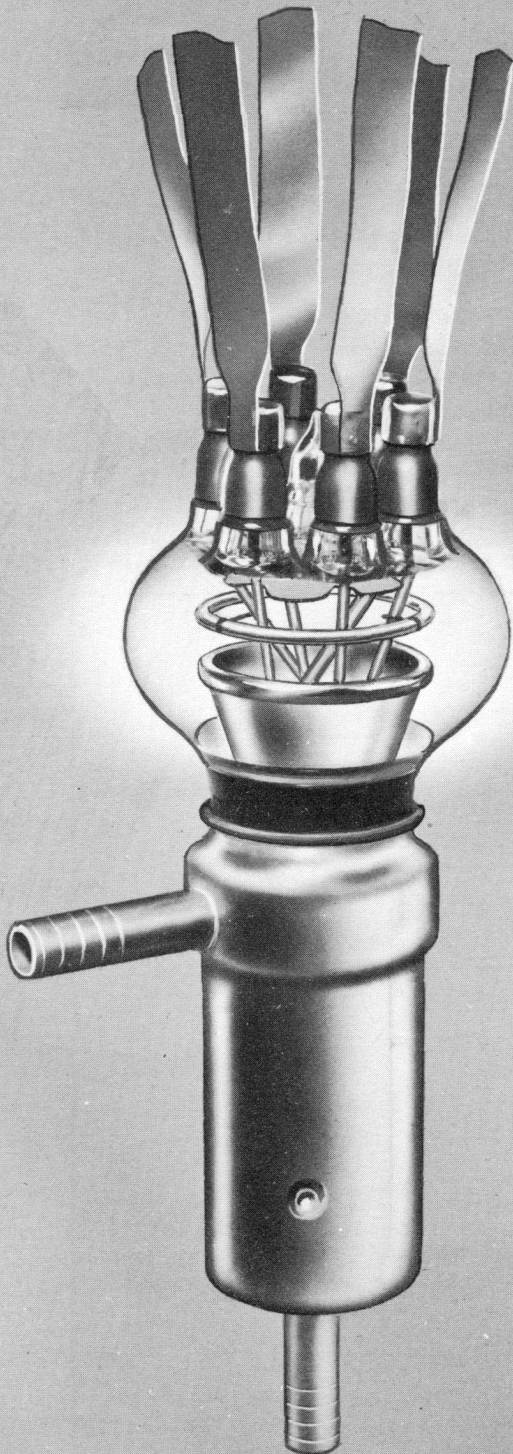

FEDERAL POWER TRIODE

Type F-6399

6 Kilowatts Plate Dissipation



Maximum Ratings vs. Operating Frequency

Frequency	30	50 Megacycles
Percentage of Maximum		
Rated Plate Voltage and Plate Input		
Class C — Telegraphy	100	75 Per Cent

Maximum Ratings and Typical Operating Conditions

RADIO-FREQUENCY POWER AMPLIFIER AND OSCILLATOR—CLASS C TELEGRAPHY

(Key-down conditions per tube without amplitude modulation)†


Maximum Ratings, Absolute Values

DC Plate Voltage	6,200 Volts
DC Grid Voltage	—1,500 Volts
DC Plate Current	1.5 Amps.
DC Grid Current	0.16 Amps.
Plate Input	9 KW
Plate Dissipation	6 KW



Typical Operation

DC Plate Voltage	4,500	5,000	6,000 Volts
DC Grid Voltage	—500	—600	—800 Volts
Peak R-F Grid Voltage	1,100	1,300	1,500 Volts
DC Plate Current	1.0	1.2	1.4 Amps.
DC Grid Current, Approximate	0.12	0.13	0.15 Amps.
Driving Power, Approximate	120	160	210 Watts
Power Output, Approximate	3	4	6 KW

†Modulation essentially negative may be used if the positive peak of the envelope does not exceed 115 per cent of the carrier conditions.

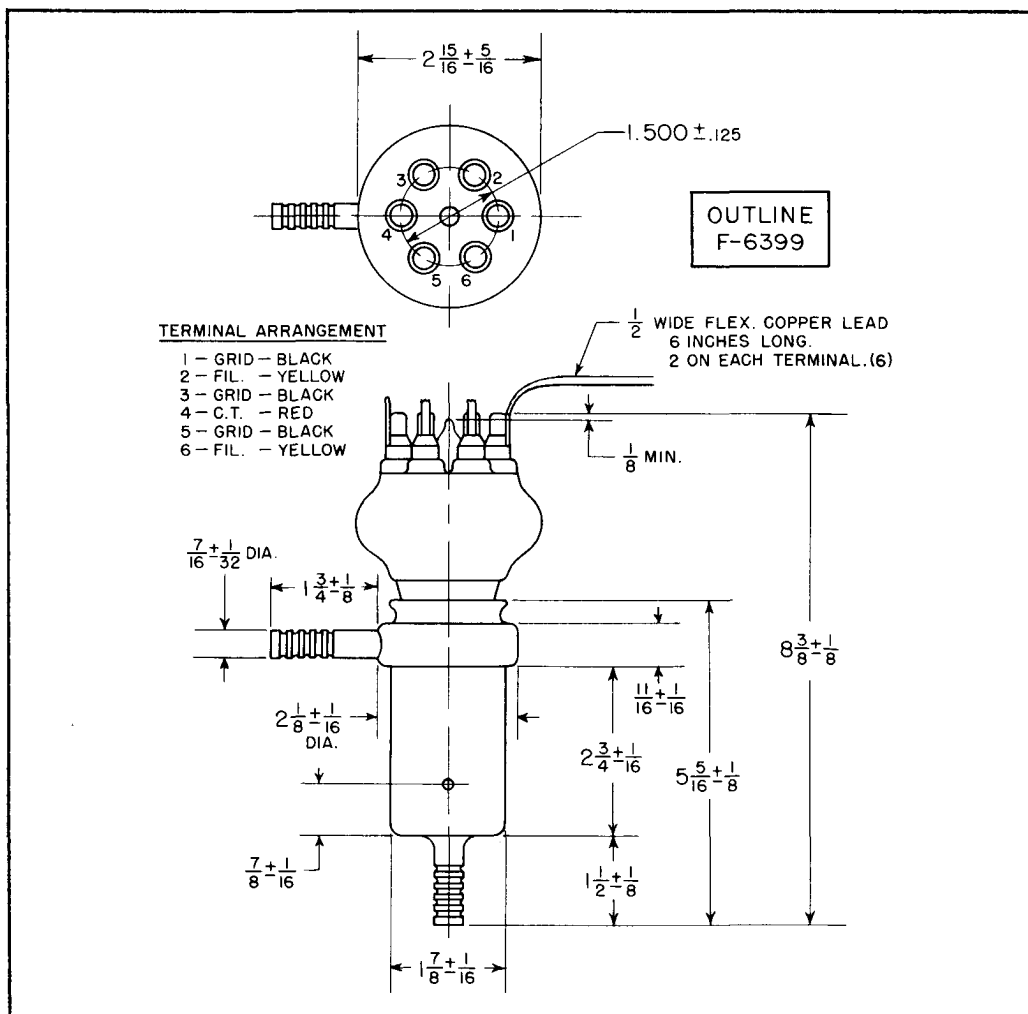


FEDERAL POWER TRIODE
Type F-6399
6 Kilowatts Plate Dissipation

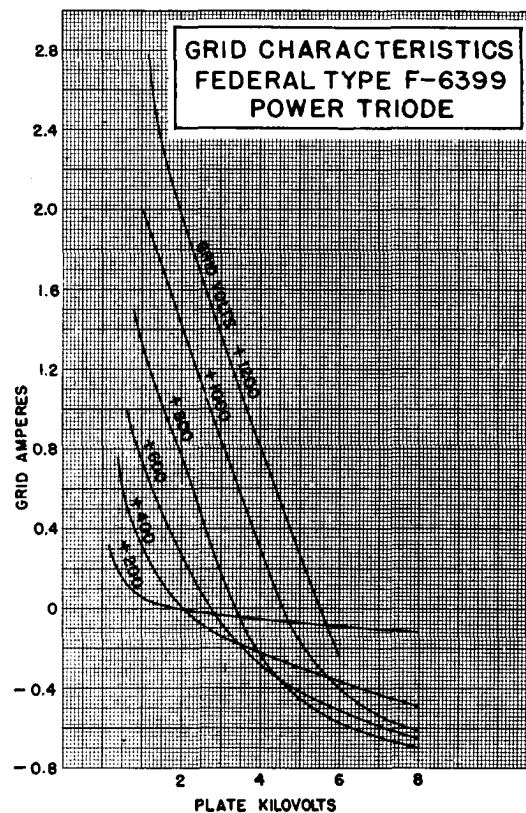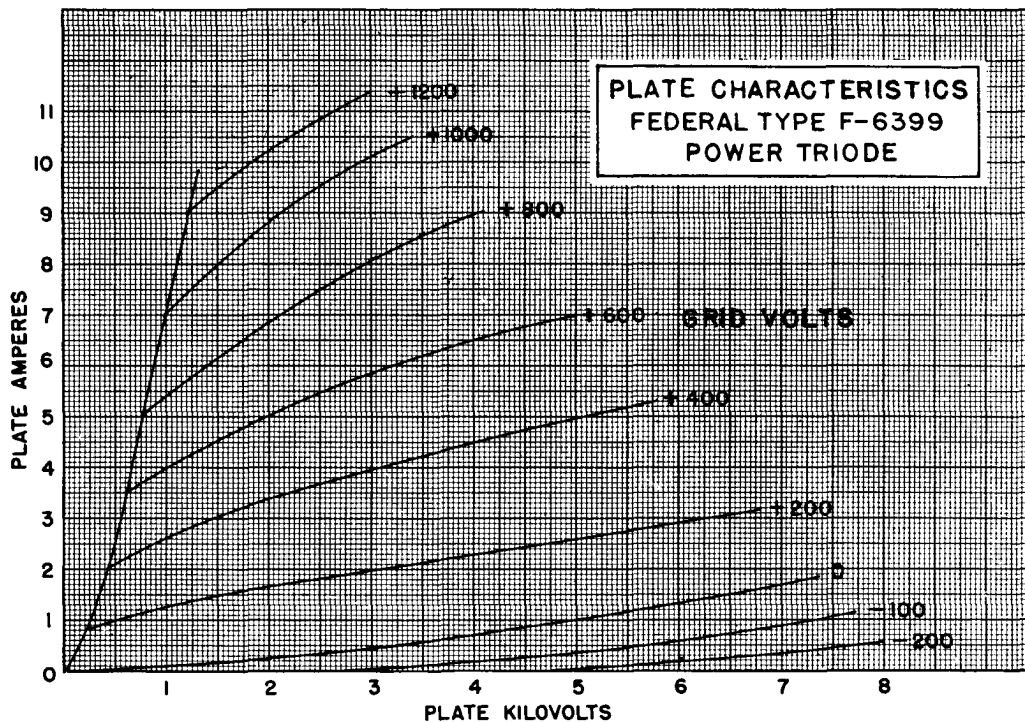

FEDERAL POWER TRIODE Type F-6399

6 Kilowatts Plate Dissipation

Grid and Filament leads attached
for convenience of equipment
designers.

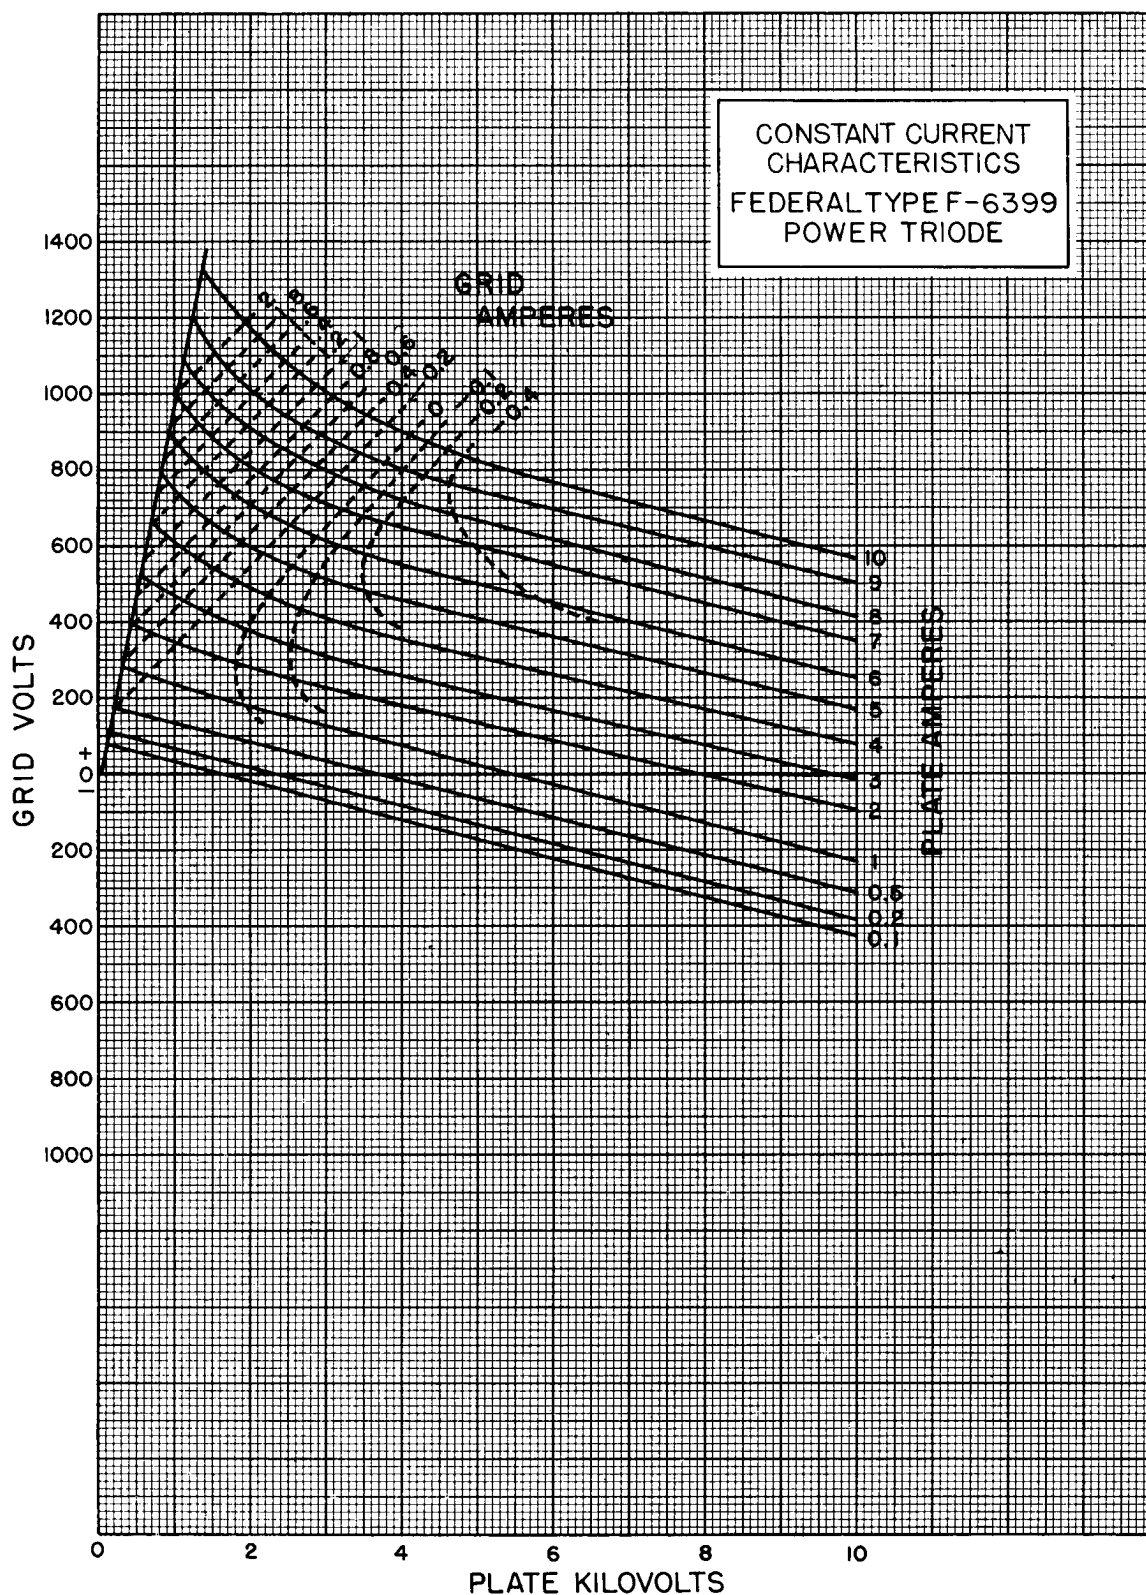

Federal Telephone and Radio Company

100 Kingsland Road VACUUM TUBE DEPARTMENT Clifton, New Jersey