


engineering TUBE DATA

F-6925
POWER TRIODE



Components Division

out of date

DESCRIPTION

The F-6925 is a triode designed for use as a modulator, r-f amplifier, and oscillator. The anode is of heavy wall construction and is forced air cooled, capable of dissipating 3 kilowatts during Continuous Commercial Service.

ELECTRICAL

Filament Voltage	13 volts
Filament Current	36 amperes
Amplification Factor	17
Direct Inter-electrode Capacitance	
Grid-Plate	21 μ f
Grid-Filament	18 μ f
Plate-Filament	1.9 μ f

MECHANICAL

Mounting Position	Vertical, Anode up or down
Type of Cooling	Forced Air
Anode Air Flow Required	
Plate Dissipation - kw	3.0 2.4 1.8
Air Flow - cfm	190 125 75
Pressure - inches of water	1.21 .58 .26
Maximum Incoming Air Temperature	45°C
Maximum Glass Temperature	180°C

MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS

R-F Power Amplifier and Oscillator - Class C

(Key down conditions per tube without Amplitude Modulation)

Maximum Ratings, Absolute Values

D-C Plate Voltage	6.5 max. kv
D-C Grid Voltage	-1.2 max. kv
D-C Plate Current	2.0 max. amperes
D-C Grid Current	.250 max. amperes
Plate Input	12 max. kw
Plate Dissipation	3 max. kw


F-6925
POWER TRIODE

-2-

Typical Operation

D-C Plate Voltage	2500	4000	6000 volts
D-C Grid Voltage	-600	-800	-1000 volts
Peak R-F Grid Voltage	1050	1300	1500 volts
Peak R-F Plate Voltage	1800	3000	5000 volts
D-C Plate Current	1.27	1.6	1.6 amperes
D-C Grid Current	.233	.230	.210 amperes
Driving Power, approx.	245	300	315 watts
Power Output, approx.	2.15	4.4	7.25 kw

This tube type is also available with 1/2" wide flexible copper leads, 6" long, attached two to a terminal.

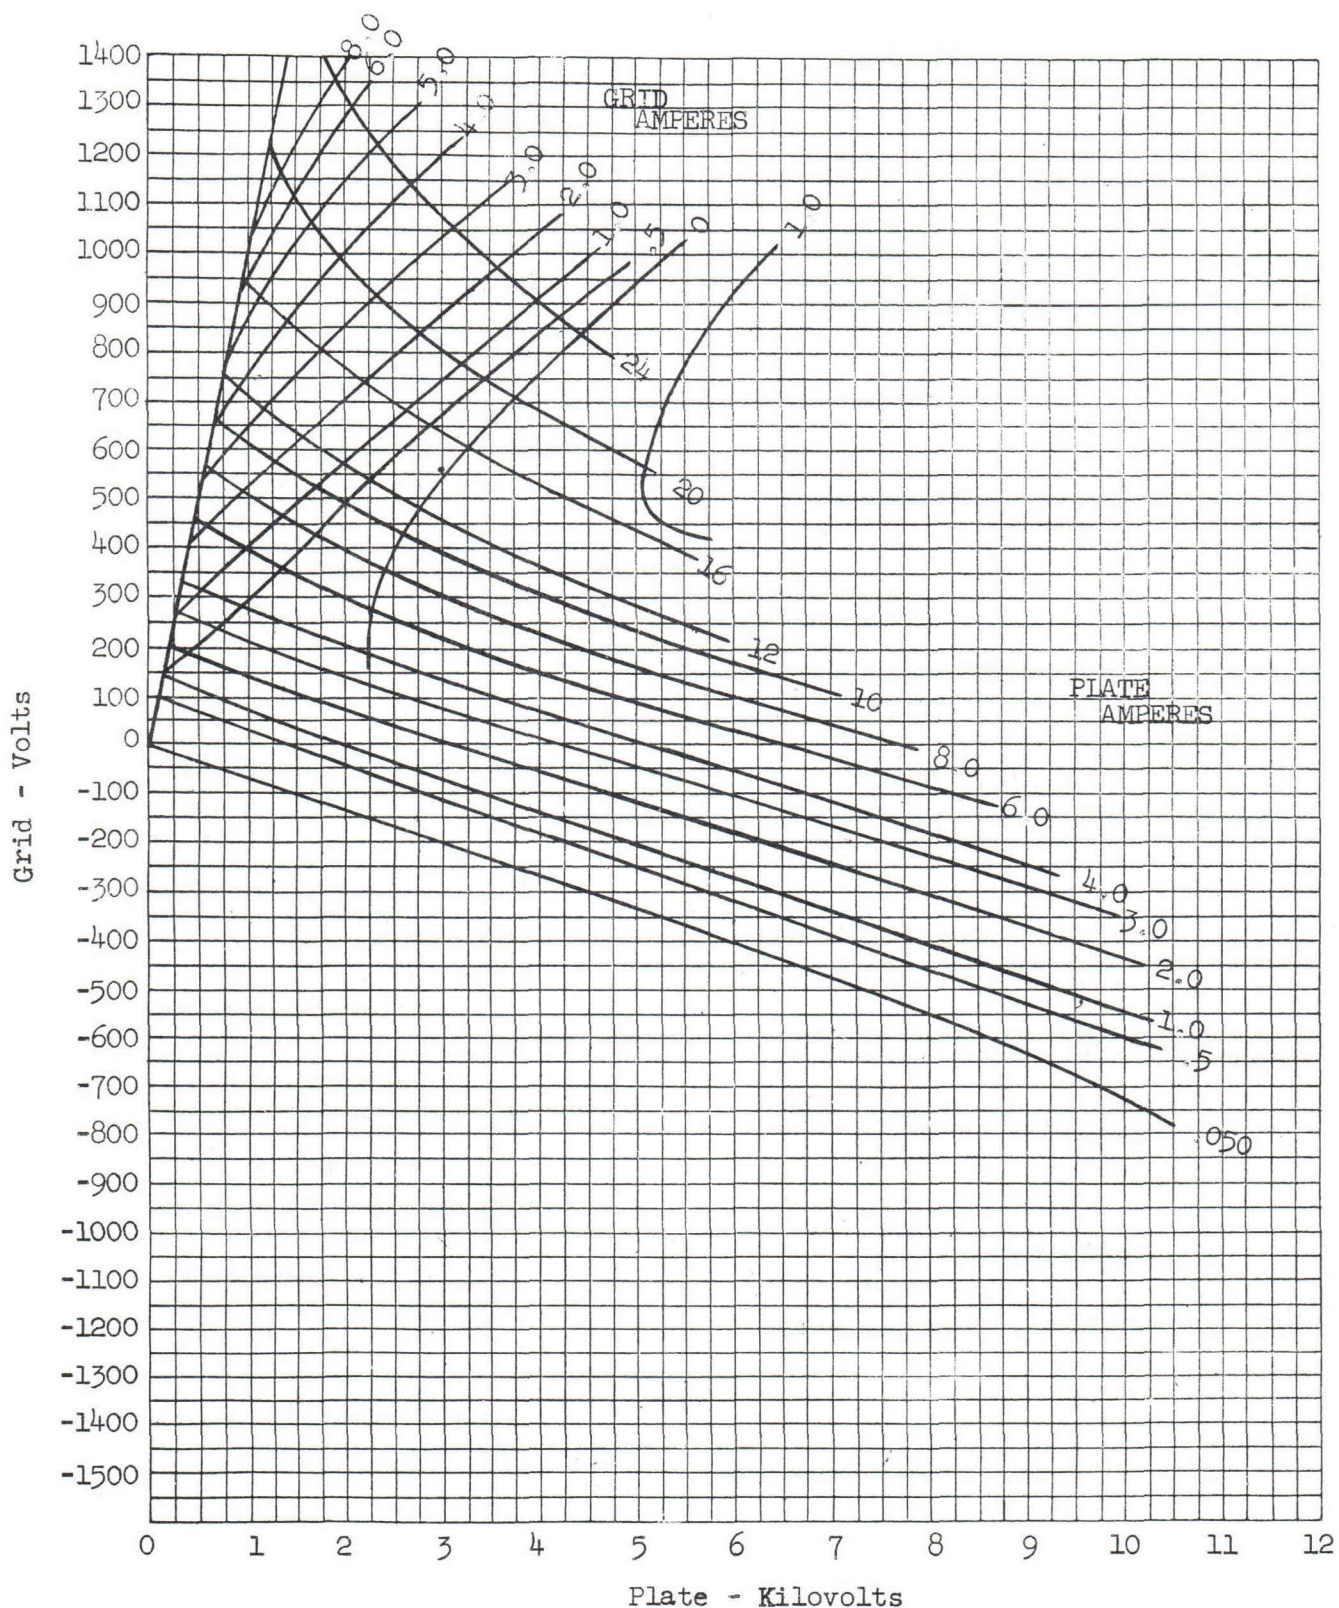

CONSTANT CURRENT CHARACTERISTICS


402

TYPES F-6925, F-6926 & F-6926J POWER TRIODES


ITT COMPONENTS DIVISION
INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION

P. O. BOX 412, CLIFTON, NEW JERSEY

FIL. TERM. --- YELLOW
 FIL. TERM. CENT. --- RED
 GRID TERM. --- BLACK

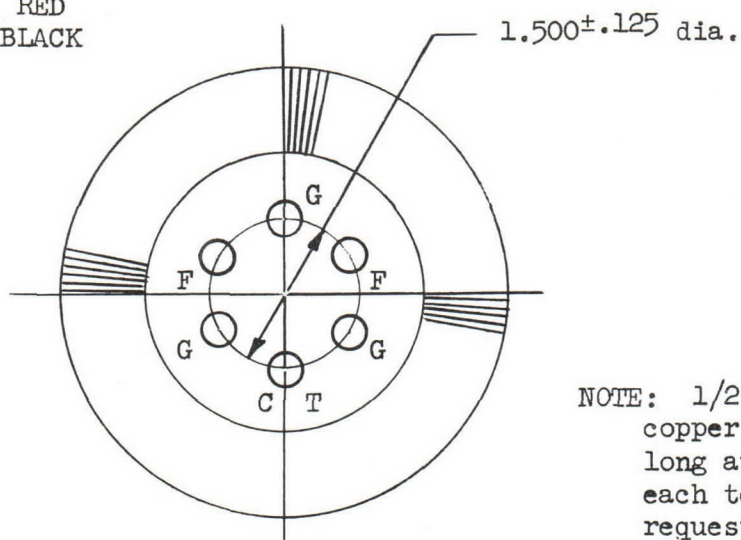

NOTE: 1/2" flexible
 copper lead 6"
 long available on
 each terminal upon
 request.

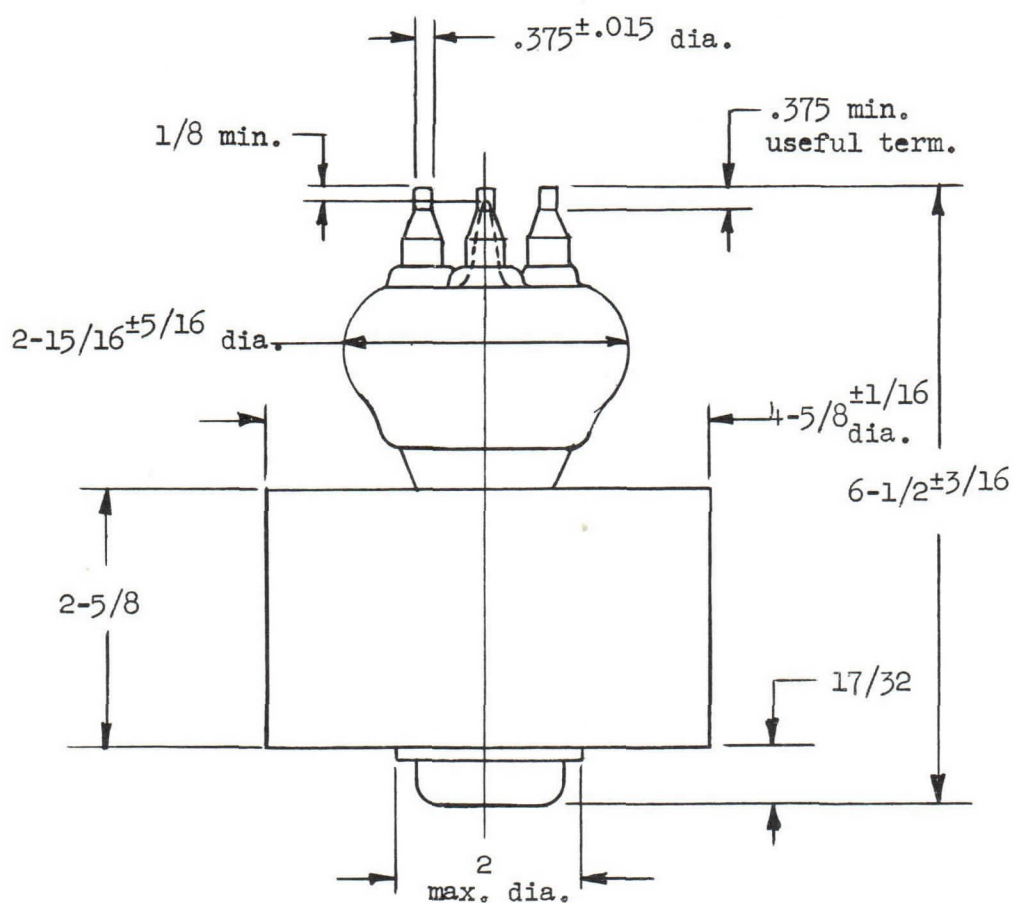

OUTLINE
 TYPE F-6925 POWER TRIODE