

FULL WAVE RECTIFIER

FW4-500


Directly-heated power rectifier for
output currents up to 250mA.

HEATER

V_f	4.0	V
I_f	3.0	A

LIMITING VALUES


P.I.V.	1,600	V
$V_{a(r.m.s.)}$ max.	2×500	V
I_{out} max.	250	mA
$V_{a(r.m.s.)}$ (V)	C (μF)	R_{lim} min. (per anode) (Ω)
2×500	16	200
2×350	32	150

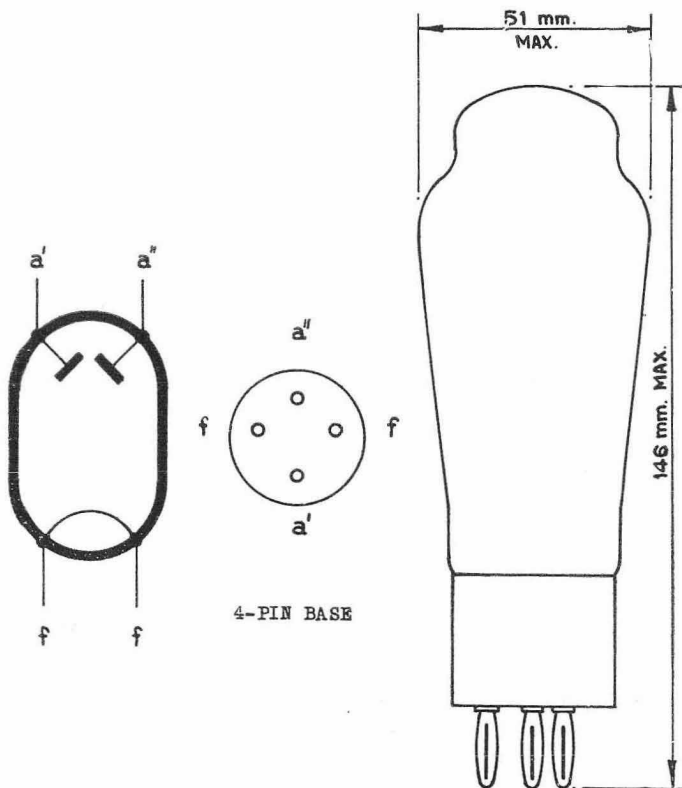

FW 4-500

FULL WAVE RECTIFIER

Directly-heated power rectifier for
output currents up to 250mA.

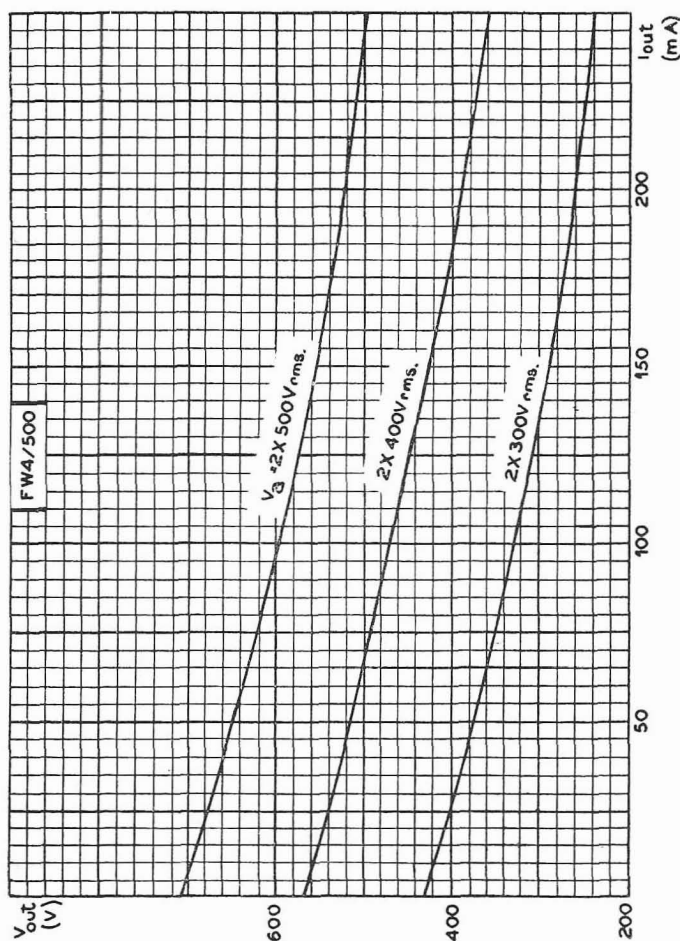

OUTPUT VOLTAGE PLOTTED AGAINST OUTPUT CURRENT
WITH ANODE VOLTAGES AS PARAMETER