

FULL WAVE RECTIFIER

FW4-800


Directly-heated power rectifier for outputs
up to 800V or 125mA.

FILAMENT

V_f	4.0	V
I_f	3.0	A

LIMITING VALUES


$V_{a(r.m.s.)}$ max.	2×850	V
I_{out} max.	125	mA
C max.	4.0	μF
R_{lim} min. (per anode)	150	Ω

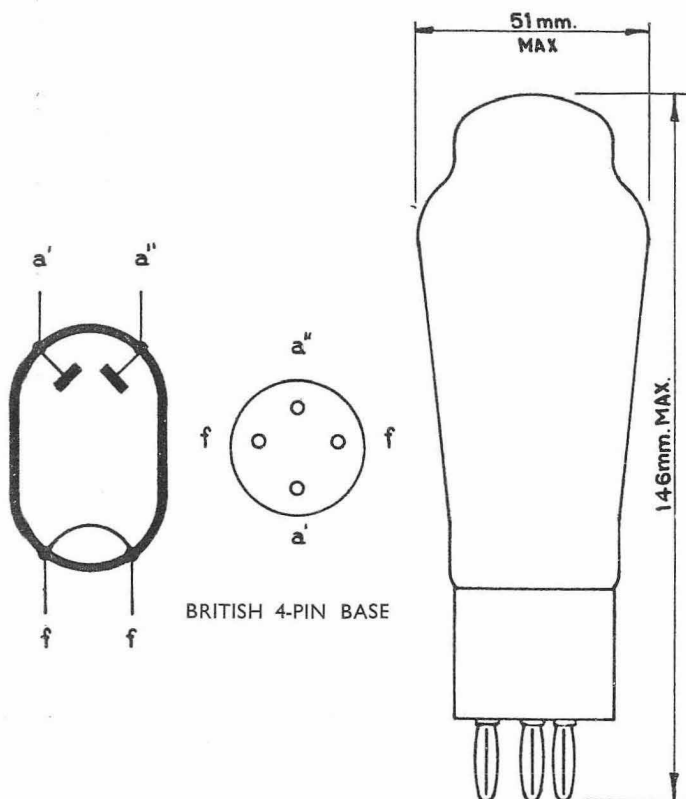

FW4-800

FULL WAVE RECTIFIER

Directly-heated power rectifier for outputs
up to 800V or 125mA.

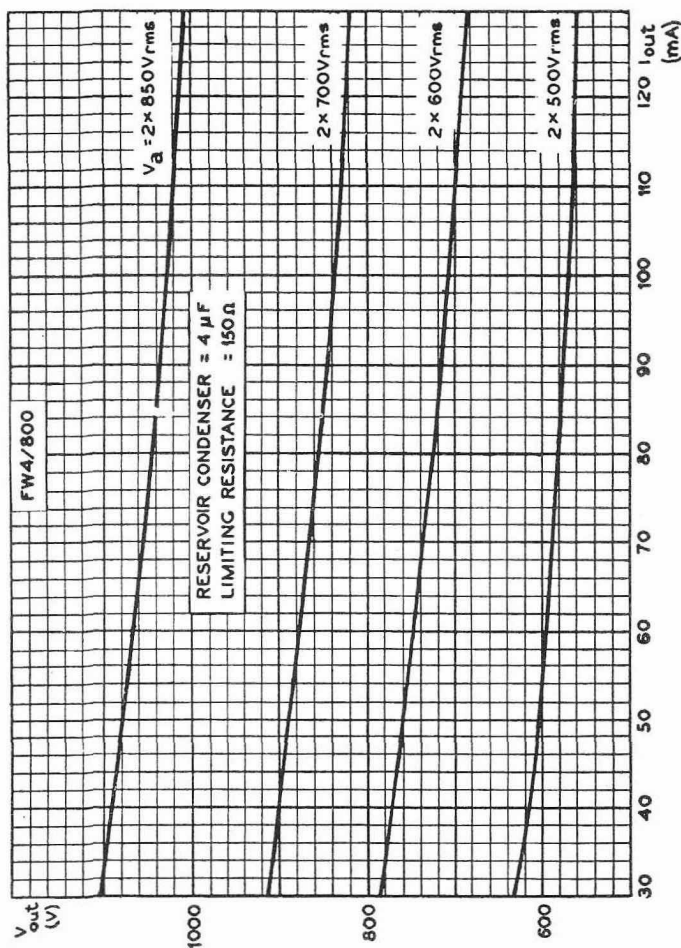

OUTPUT VOLTAGE PLOTTED AGAINST OUTPUT CURRENT WITH
ANODE VOLTAGES AS PARAMETER