High-Voltage Cold-Cathode Voltage Stabiliser

Code: G400/2G (CV4047)

The G400/2G is a reliable, miniature high-voltage gas-filled stabiliser fitted with a flying lead base for wiring directly into the circuit. It has been developed for use where a high degree of stability is required.

MECHANICAL DATA

Maximum overall length (less leads)	47.6	mm
Maximum bulb diameter	19.1	mm
Minimum lead length	38.1	mm
Base	B7G/F	
Net weight	8.5	g
Mounting position	Unrestricted	

CHARACTERISTICS

Maximum striking voltage	400	V
Nominal striking voltage	375	V
Maximum stabilising voltage at 3 mA	314	V←
Minimum stabilising voltage at 3 mA	302	V←
Nominal stabilising voltage at 3 mA	306	V←
D.C. operating current	2 to 4	mA
Nominal regulation, 2 to 4 mA	−1	V←
Maximum regulation, 2 to 4 mA	+0.5 −2.5	V←
Nominal drift in stabilising voltage (0 to 1 000 hours)	2	V←
Temperature coefficient, −20 to +90°C	30	mV/°C←
Ambient temperature range	−55 to +90	°C←

NOTE.—In use, leads numbers 4 and 6 must be directly connected together in the external circuit.

© *1958 Standard Telephones and Cables Limited*

High-Voltage Cold-Cathode Voltage Stabiliser

Code: G400/2G (CV4047)

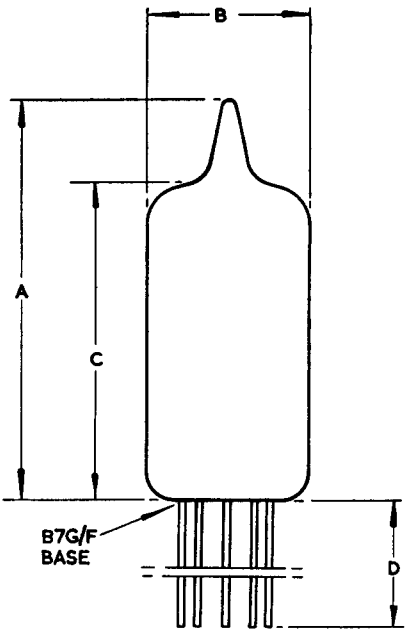



BASING

1. I.C.
2. CATHODE.
3. I.C.
4. ANODE.
5. I.C.
6. PRIMING ANODE.
7. I.C.

DIM.	MILLIMETRES	INCHES
A	47·6 MAX.	1 7/8 MAX.
B	19·1 MAX.	3/4 MAX.
C	38·1 ± 2·4	1 1/2 ± 3/32
D	38·1 MIN.	1 1/2 MIN.

NOTE:– BASIC FIGURES ARE INCHES.