



THYRATRON

DESCRIPTION

The GL-884 is an inert-gas-filled thyatron designed for use as a sweep-circuit oscillator in cathode-ray tube circuits. This thyatron may also be used for general control applications where it is desired to actuate the tube with a change in negative grid voltage.

TECHNICAL INFORMATION

These data are for reference only. For design information refer to specifications.

GENERAL CHARACTERISTICS

Number of electrodes	3
Electrical	
Cathode—Indirectly heated type	
Voltage	6.3 volts
Current, approx.	0.6 amperes
Heating time, typical	30 seconds
Peak voltage drop, approx.	16 volts
Approximate control characteristics	
Anode voltage	300 volts
Grid voltage	—30 volts
Capacitance, approx	
Grid-to-anode	3.5 micromicrofarads
Grid-to-cathode	3.5 micromicrofarads
Anode-to-cathode	2.5 micromicrofarads
Mechanical	
Net weight, approx.	3 ounces
Shipping weight, approx.	3 pounds


Electronic
TUBE

GENERAL  ELECTRIC

TECHNICAL INFORMATION (CONT'D)

MAXIMUM RATINGS

SWEEP-CIRCUIT OSCILLATOR RATING

Maximum anode voltage	
Peak, between any two electrodes	350 volts
Instantaneous	300 volts
Maximum anode current	
Peak	300 milliamperes
Average, 200 cycles per second and above	2 milliamperes
Average, below 200 cycles per second	3 milliamperes

GRID-CONTROLLED RECTIFIER RATING


(For frequencies below 75 cycles per second)	
Maximum peak anode voltage	350 volts
Maximum peak anode current	300 milliamperes
Maximum anode current*	75 milliamperes

* Average over period of not more than 30 seconds.

OPERATING NOTES

For both classes of service the grid resistor used should not be less than 1000 ohms per maximum instantaneous volt applied to the grid. Resistance values in excess of 0.5 megohms may cause circuit instability.

GL-884- $E_f = 6.3$ VOLTS


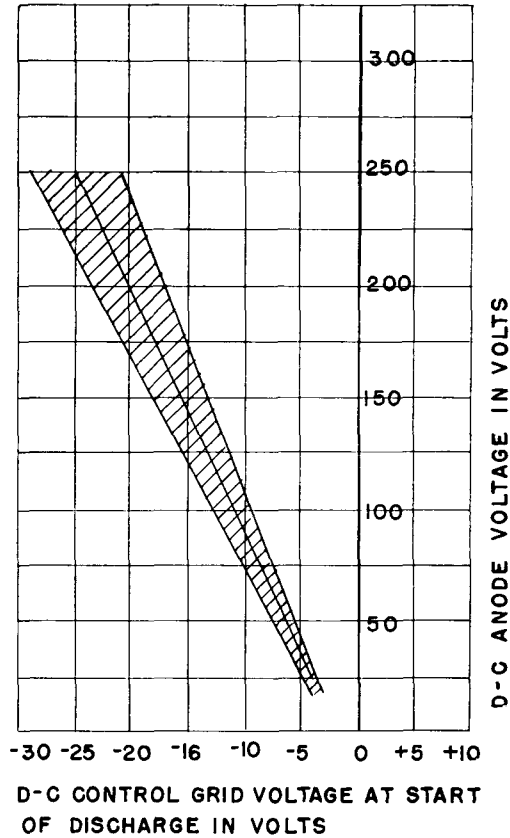


K-8639640

GL-884

6-6-44

TYPICAL CONTROL CHARACTERISTICS
SHADED AREA SHOWS RANGE OF CHARACTERISTICS

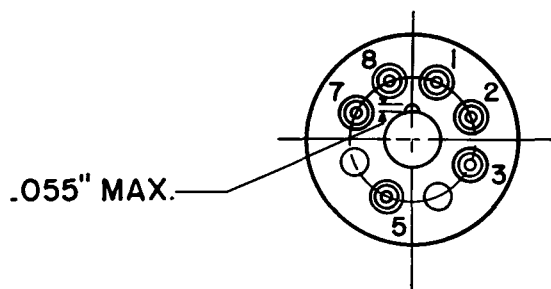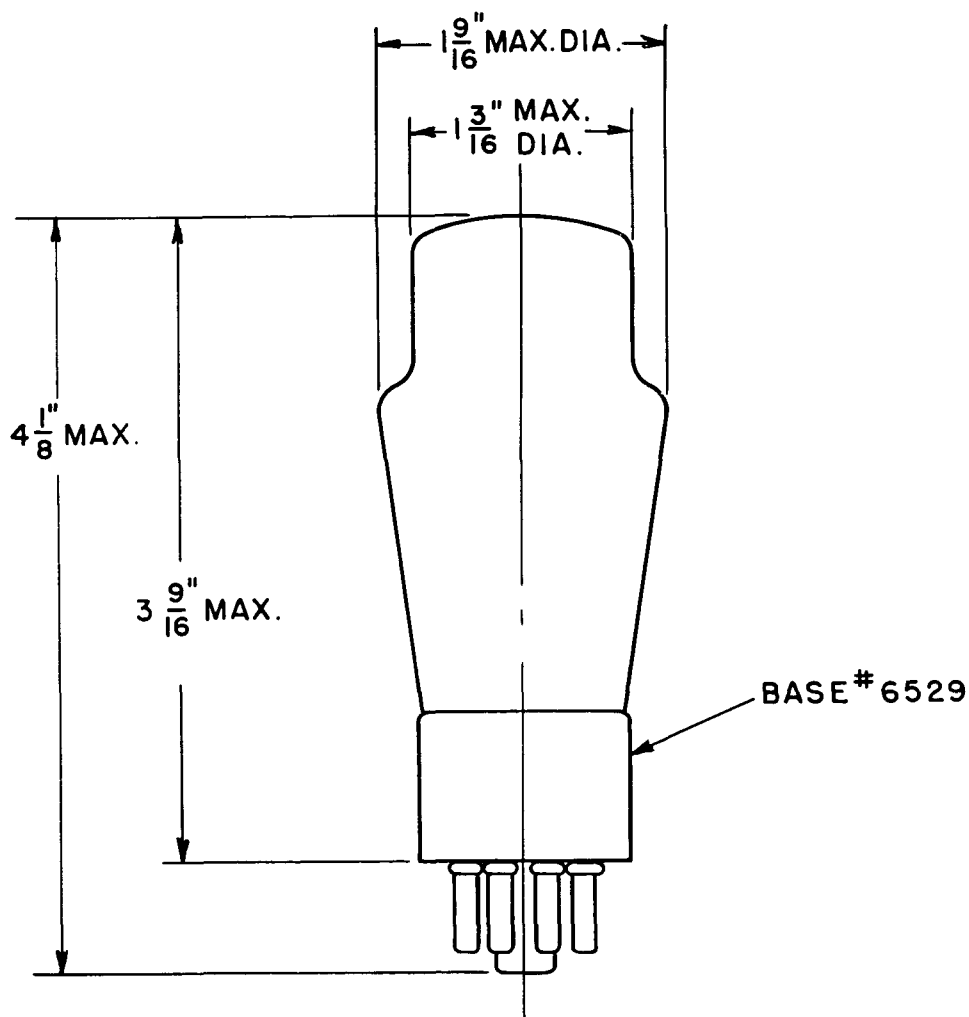

PIN	CONNECTION
1	NO CONNECTION
2	HEATER
3	ANODE
5	GRID
7	HEATER
8	CATHODE

K-8639389

OUTLINE
GL-884 THYRATRON

8-10-44

