

***DIGITRON—Long Life 7 Character End-Viewing GR 7 M**

Cold Cathode Register Tube Containing

Characters +, -, V, A, Ω , %, and ~

Characteristics & Recommended Operating Conditions (at room temperature unless otherwise stated)

Minimum anode to cathode voltage to ensure breakdown	160V
Nominal running voltage at 2mA	140V
D.C. Operation -	
Recommended Cathode Current	2mA
Min. Positive bias on non-conducting cathodes (See Note 1)	60V
Half-wave A.C. Supply -	
Recommended Cathode Current, average	1.5mA
peak	7mA
Min. Positive bias on non-conducting cathodes (See Note 1)	40V
Life Expectancy (2mA Cathode Current)	
Continuous ionisation of one Cathode	>5,000 hours
Sequentially Switching Cathodes every 100 hours or less	>30,000 hours

Absolute Maximum Ratings

Cathode current (each character) -	
Maximum average (averaging time = 20mS)	2.5mA
Maximum peak	10mA
Minimum for D.C. operation	1.0mA
Bulb temperature -	
Maximum	+ 70°C
Minimum	-50°C

Notes:-

- (1) Under limit conditions some deterioration of the glow appearance may occur during life. To minimise this, the voltage between the conducting and non-conducting cathodes should be as high as possible.

* Registered Trade Mark



GR 7 M *DIGITRON—Long Life 7 Character End-Viewing Cold-Cathode Register Tube Containing Characters +, -, V, A, Ω, %, and ~


Mechanical Data

Mounting position
Base
Socket

Any
B13B
B13B


Base Connections
(underside view)

CENTRE LINE OF CHARACTERS





- Pin 2 Anode
3 Cathode Ω
4 Cathode %
6 Cathode V
7 Cathode +
9 Cathode ~
10 Cathode A
12 Cathode -

Note - All other pins are
to be left unconnected.

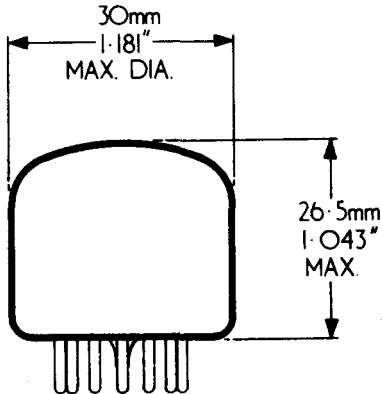

The dome of the tube
is filter coated



* Registered Trade Mark

