

Vorläufige Daten.
Caracteristiques
provisoires.
Tentative data.

PHILIPS „MINIWATT” KL5

KL5

Röhrentype: Endpenthode.

Type de tube: penthode de sortie.

Type of tube: power output pentode.

Heizung dir., Batteriestrom, Parallelspeisung.

Chauffage dir., courant batterie, alimentation en parallèle.

Heating dir., battery current, parallel filament supply.

Vf 2 V

If 0,1 A

Kapazitäten.

Capacités.

Capacities.

Capl < 0,6 μ F

Betriebsdaten als Klasse-A-Endverstärker.

Caracteristiques de service, utilisation comme amplificatrice de sortie classe A.

Operating conditions for use as class A power amplifier.

Va	90	135 V
Vg2	90	135 V
Vg1	-4	-6,5 V
Ia	4,8	8,5 mA
Ig2	0,9	1,5 mA
S	1,4	1,7 mA/V
Ri	180000	135000 Ω
Ra	19000	16000 Ω
Wo (dtot = 10%)	0,2	0,52 W
Vi (dtot = 10%)	2,6	4,8 V(eff)
V1 (Wo = 50 mW)	0,7	0,8 V(eff)

Betriebsdaten für 2 Röhren in Gegentaktschaltung.

Caracteristiques de service pour 2 tubes en push-pull.

Operating conditions for 2 tubes in push-pull.

Va	90	135 V
Vg2	90	135 V
Vg1	-8,5	-12 V
Iao	2 x 1	2 x 2 mA
Ia max	2 x 3,6	2 x 6,25 mA
Ig2o	2 x 0,1	2 x 0,35 mA
Ig2 max	2 x 1,0	2 x 2,4 mA
Ra	25000	25000 Ω
Wo	0,35	1,05 W
Vi	6,5	8,7 V(eff)
dtot	3,8	7 %

Grenzdaten.

Limites fixées pour les caractéristiques.

Limiting values.




Va	max. 200 V
Wa	max. 2,0 W
Vg2	max. 200 V
Wg2 (Vi = 0)	max. 0,5 W
Wg2 (Wo = max)	max. 1,0 W
Ik	max. 12 mA
Vg1	max. -0,2 V
Rg1	max. 1 M Ω

KL5

PHILIPS „MINIWATT” KL5

Vorläufige Daten
Caracteristiques
provisoirees
Tentative data.


Elektrodenanordnung, Sockelanschlüsse und max. Abmessungen in mm.
Disposition des électrodes, connexions du culot et dimensions max. en mm.
Electrode arrangement, base connections and max. dimensions in mm.



PHILIPS „MINIWATT“

KL5


KL5

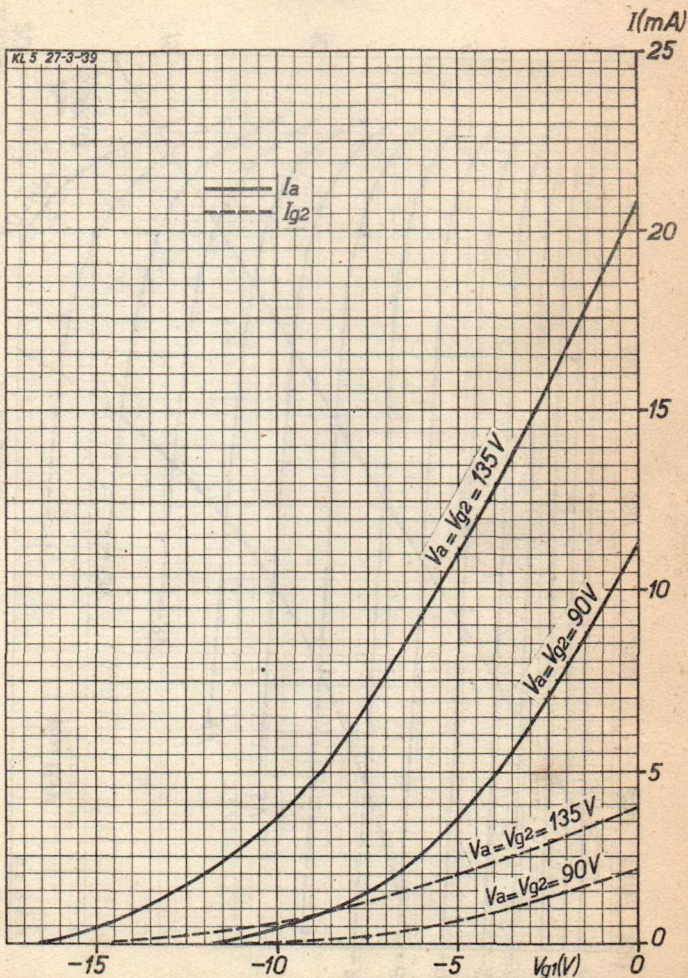

KL5

PHILIPS „MINIWATT“


KL5

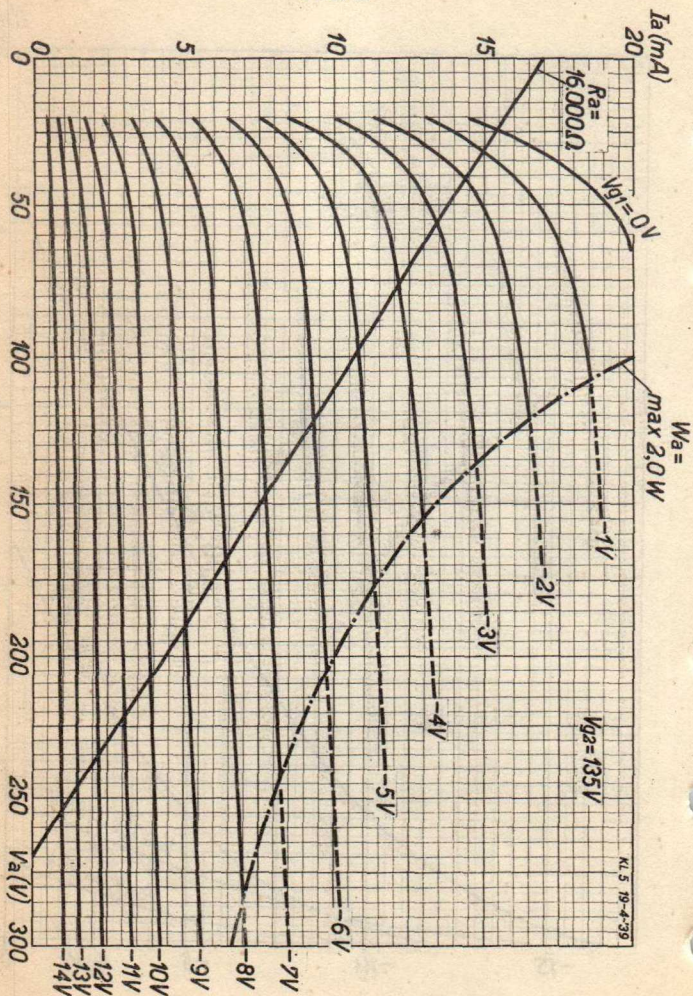

PHILIPS „MINIWATT“

KL5


KL5

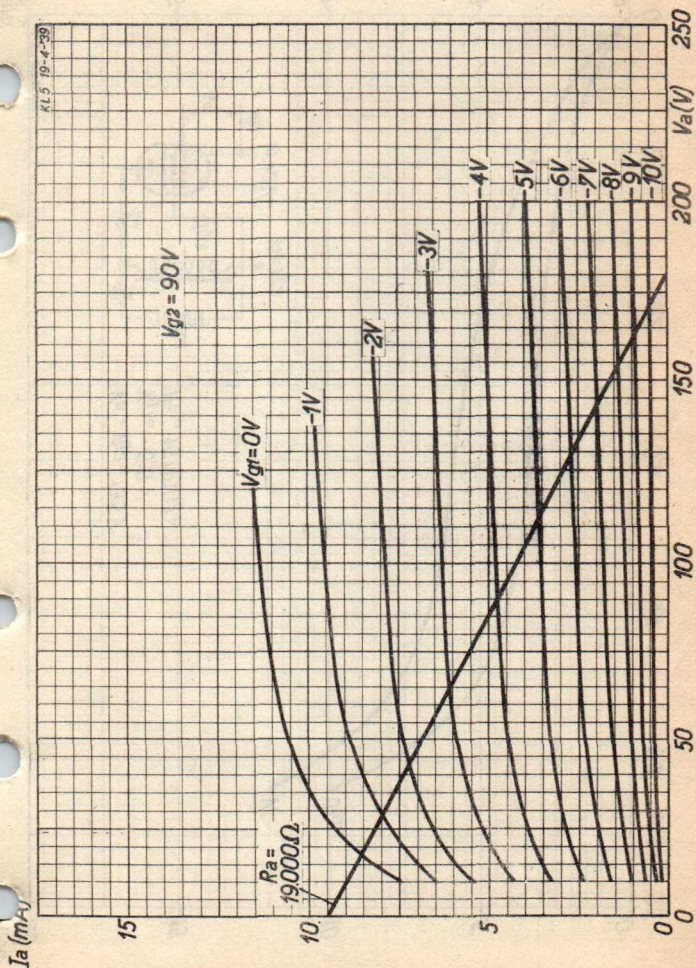

KL5

PHILIPS „MINIWATT“


KL5

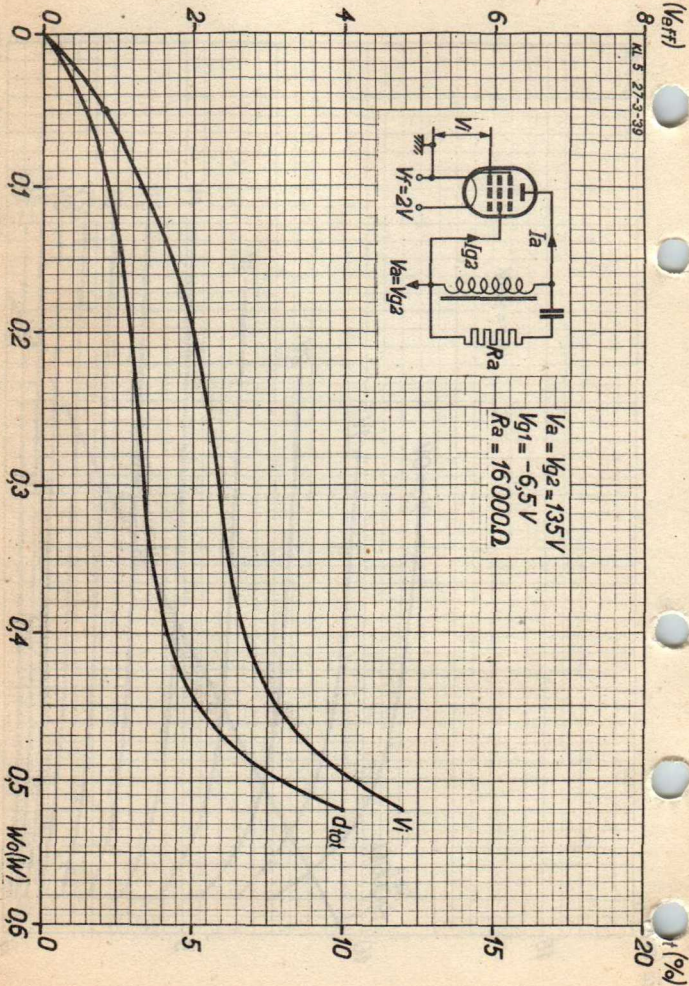

PHILIPS „MINIWATT“

KL5

KL5

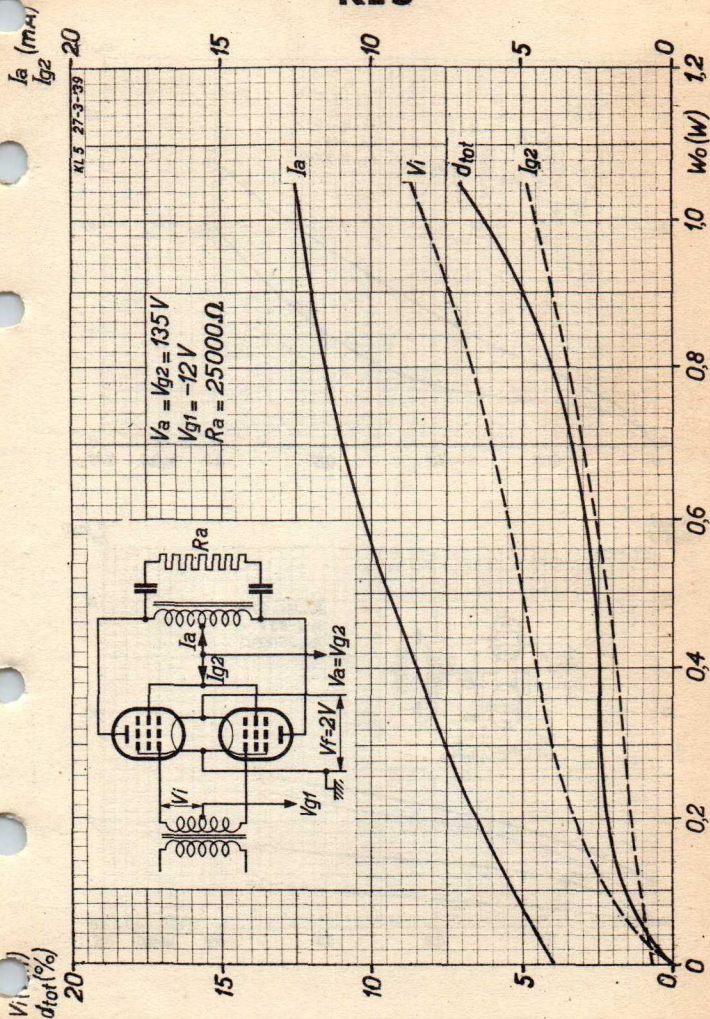

KL5
PHILIPS „MINIWATT“
KL5
