


NL-1051 IGNITRON

Size B 56 Amperes dc

National Ignitron NL-1051 is a metal, water-cooled, mercury pool tube designed especially for welder control and similar AC control applications. Its rating is approximately equivalent to a 300 ampere magnetic contactor. **NL-1051** utilizes a thermostat mount brazed to an all-copper cooling system that provides exceptional cooling efficiency. The inner can, copper cooling coil, and thermostat mount being brazed together in a single unit assures a rugged, dependable, and adjustment free temperature control system that operates directly on inner can temperature.

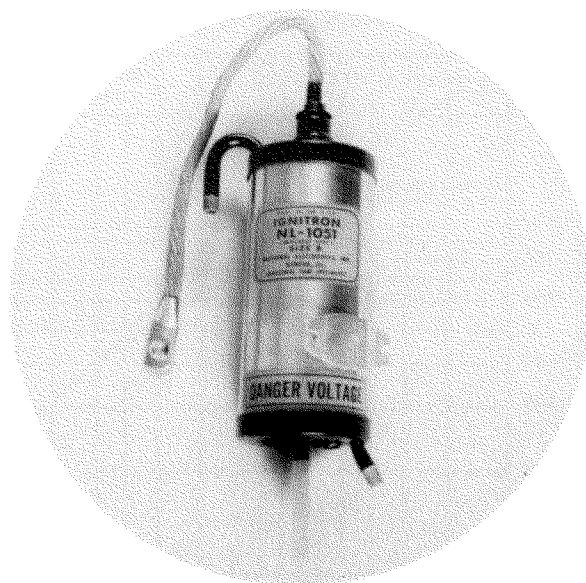

TECHNICAL INFORMATION

AC Control Applications — Ratings are based on full-cycle conduction (no phase delay) regardless of whether or not phase control is used, on frequencies from 25 to 60 cycles, and any voltage between 250 and 600 volts rms. Ratings are for two tubes in inverse parallel.

¹ Maximum demand — kva	600	¹ Maximum averaging time — seconds	
¹ Corresponding maximum average anode current		at 600 volts rms	11.25
per tube — amps DC	30.2	at 250 volts rms	27
¹ Maximum average anode current per tube — amps DC	56	Maximum surge current —	
¹ Corresponding maximum demand — kva	200	peak amps	280%
			of max. rms. demand current

²Rectifier Applications — Ratings are based on intermittent duty, on no phase delay, and on frequencies from 50 to 60 cycles. When phase control is used, current ratings are reduced as per phase control current rating curve. Values are for one tube.

Maximum peak anode voltage — volts	500	1200	1500	Maximum averaging time, sec.	6	10	10
Maximum peak anode current — amps	700	600	480	Max. ratio of average to peak current,			
Corresponding average current—amps DC	5	4		maximum averaging time 0.2 seconds	—	.166	.166
Maximum average anode current —				Ratio of fault to max. peak current	12.5	12.5	12.5
amps DC	40	22.5	18	Maximum duration time of surge current			
Corresponding peak current — amps	135	108		— sec.	.15	.15	.15

Ignition Requirements — (Same for both applications.)

Ignitor Voltage	
Maximum instantaneous allowed,	
ignitor positive	anode voltage
³ Maximum instantaneous required,	
ignitor positive — volts	200
Maximum instantaneous allowed,	
ignitor negative — volts	5

Ignitor Current	
Maximum instantaneous allowed — amperes	100
³ Maximum instantaneous required — amperes	30
Maximum rms allowed — amperes	10
Maximum average allowed — ampere	1
³ Ignitor ignition time maximum — microseconds	100
Ignitor current max. averaging time — seconds	5

Cooling Requirements — (Same for both applications.)

Type of cooling	Water
Minimum inlet water temperature, °C	0
Maximum cooling system temperature	
(measured at thermostat mount). °C	
Rectifier applications	45
AC control applications	
At 600 volts rms	45
At 500 volts rms	50
At 250 volts rms	55

Water flow may be reduced at light loads if cooling system temperature (measured at thermostat mount) is maintained within limits.

Typical cooling requirements at 500 volts rms operation for AC control applications.

Inlet Water Temp. °C	100% Load		50% Load	
	Water flow required G.P.M.	Pressure drop per tube lbs. per sq. in.	Water flow required G.P.M.	Pressure drop per tube lbs. per sq. in.
15	1/4	.4	1/16	.1
30	1/2	.75	1/8	.2
40	1-1/2	3.0	1/4	.4

More water is required at 600 volts to maintain cooling system temperature within limits and less at 250 volts.

Water temperature rise at 1 G.P.M., full load, °C 2 |

Approximate temperature rise inlet water to thermostat, °C 4

GENERAL CHARACTERISTICS

Number of Anodes	1
Number of Ignitors	1
Mounting Position	Vertical
Peak arc drop at 3400 peak amps — approx. volts	26

Peak arc drop at 176 peak amps. — approx. volts	13
Net weight — lbs.	4½
Approx. shipping weight — lbs.	7

¹Using log-log paper, straight line interpolation of RMS Demand Current vs. Average Anode Current and Maximum Averaging Time vs. Anode Voltage may be used to determine intermediate ratings.

²Using log-log paper, straight line interpolation of Peak Anode Current vs. Average Anode Current may be used to determine intermediate ratings. See curves for details.






³Ignition will occur if either maximum required instantaneous potential is applied or maximum required instantaneous current flows for the rated maximum ignitor ignition time.

Printed in USA 8-57 GR

NATIONAL ELECTRONICS, INC.

GENEVA, ILLINOIS, U. S. A.

NL-1051 IGNITRON

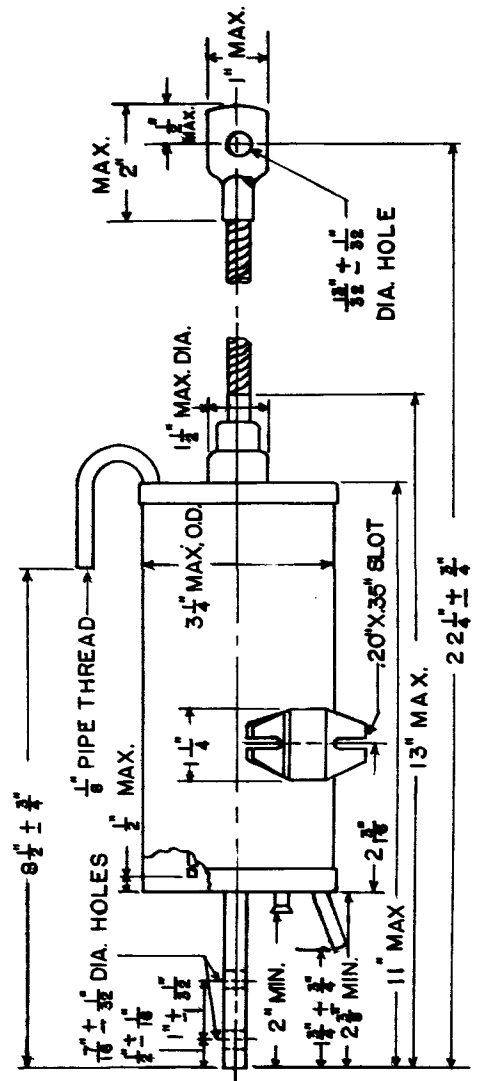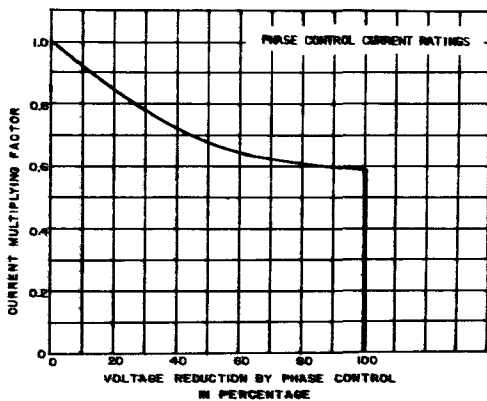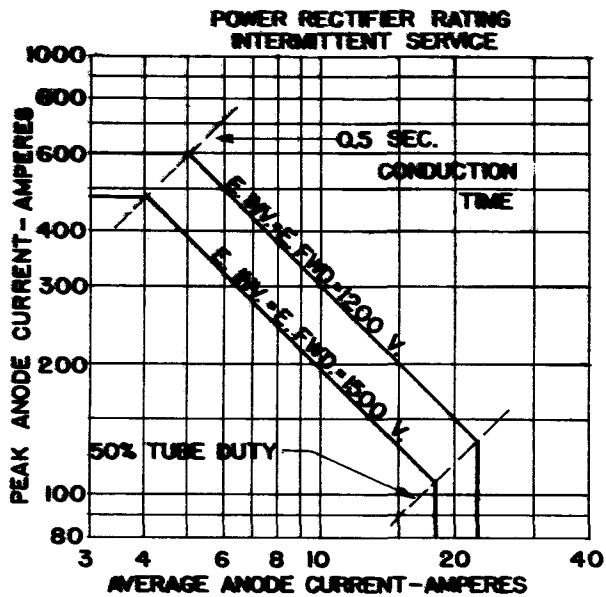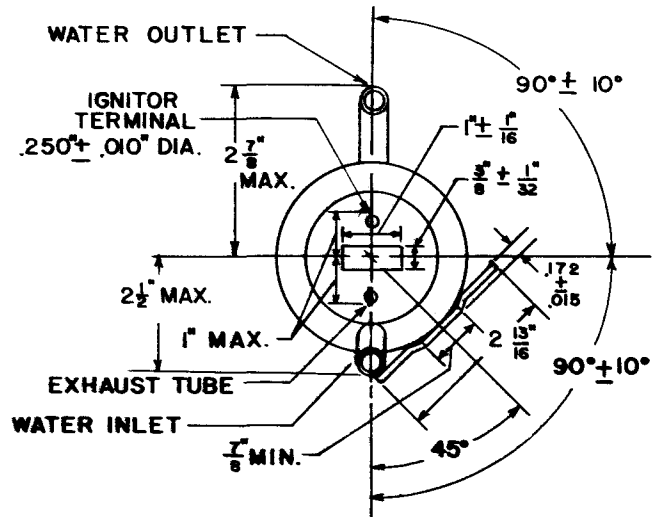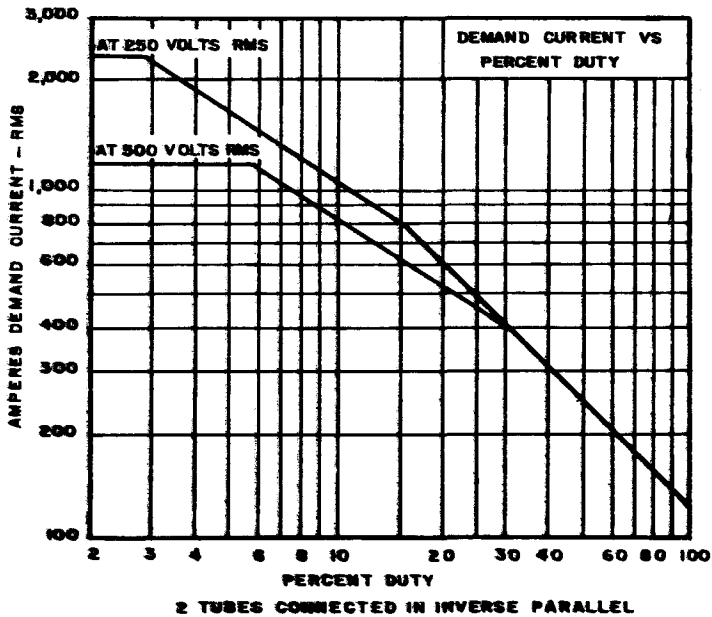

NATIONAL ELECTRONICS, Inc.

GENEVA, ILLINOIS, U. S. A.