


NL-5750 AND NL-5750S NUMERICAL READOUT TUBES

The **NL-5750** is an ultra long life cold cathode numerical display tube. It has the capability of displaying numerals from 0 through 9. The NL-5750 has two independently operable decimal points, one to the left and one to the right of the numerals. The tube is designed to operate equally well in the normal dc mode or in the high peak low duty mode of a time share strobed application. The high peak current capability (15 ma) allows a clear bright display under low duty cycle conditions.

The **NL-5750S** is identical to the NL-5750 with the leads cut to 0.175" $\pm$.015" for use in the RTS-44 socket.

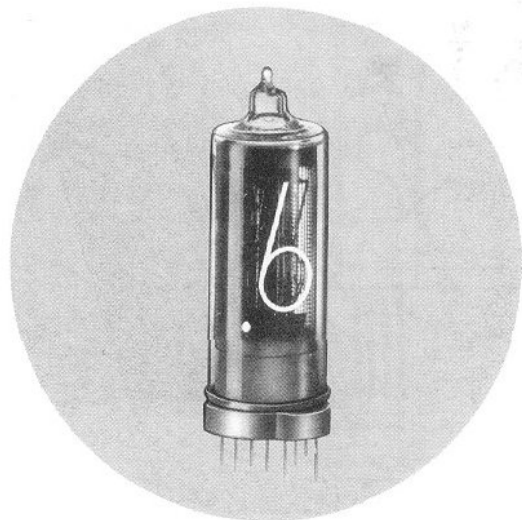

TECHNICAL INFORMATION

Ionization Voltage (Maximum)	170 Vdc
¹ Supply Voltage (Minimum)	170 Vdc
Cathode Current	
² Peak (Maximum) strobe only	15 ma
Average (Maximum)	3.8 mA
Average (Minimum)	1.8 mA
Decimal Point Current	
Average (Maximum)	0.3 mA
Average (Minimum)	0.1 mA
Prebias Limits	+ 60V dc to +120V dc
Temperature Limits	-20°C to +55°C
(Reduced Life)	-40°C to +70°C
Life (Dynamic)	200,000 Hours
Weight	0.3 oz.
Mounting Position	Vertical with pins 6 & 7 in front

Recommended Operating Conditions: see figure 1.

(a) No decimal point or decimal point operated only in conjunction with another character.			
Supply Voltage (E_{bb})	170V dc	250V dc	300V dc
Anode Resistor (R_p)	9.1K Ω	43K Ω	62K Ω
(b) When the decimal point is to be operated separately, with or without another character it is recommended an individual decimal point resistor be used in addition to the resistor in the anode circuit. See Figure 1.			
Supply Voltage (E_{bb})	170V dc	250V dc	300V dc
Anode Resistor (R_p)	9.1K Ω	43K Ω	62K Ω
Decimal Point Resistor (R_d)	120K Ω	560K Ω	750K Ω

Note: ¹Use of the highest voltage available with the appropriate resistor is recommended.

²Maximum pulse duration 5 milliseconds with maximum duty cycle of 10%.

Printed in U.S.A. 5/69



NATIONAL ELECTRONICS, INC.

a varian subsidiary

GENEVA, ILLINOIS, 60134

TELEPHONE 312 232-4300
TWX 910 237-1685

NL-5750 AND NL-5750S NUMERICAL READOUT TUBES

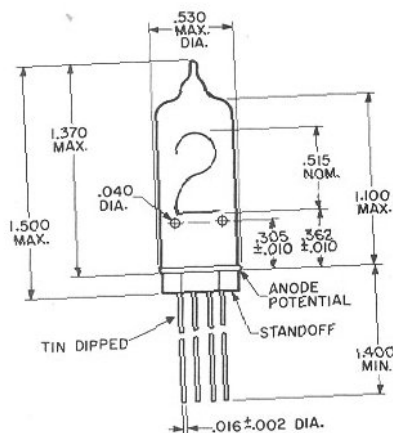

OUTLINE DRAWING

NORMAL VIEWING

7 0 0 6
8 0 0 5
14 0 9 0 0 4 0 13
10 0 0 3
11 0 0 2
12 0 0 1

(BOTTOM VIEW)

BASING DIAGRAM


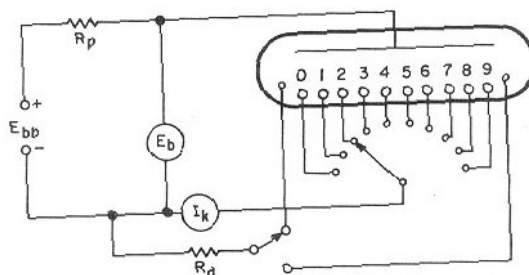


FIGURE 1


Pin	Connections
1	NUMERAL 1
2	NUMERAL 2
3	NUMERAL 3
4	NUMERAL 4
5	NUMERAL 5
6	NUMERAL 6
* 7	ANODE
8	NUMERAL 7
9	NUMERAL 8
* 10	ANODE
11	NUMERAL 9
12	NUMERAL 0
13	RT. DEC. PT.
14	LFT. DEC. PT.

*Connected internally.


PIN CONNECTIONS



TOP VIEW




END VIEW




BOTTOM VIEW

RTS-44

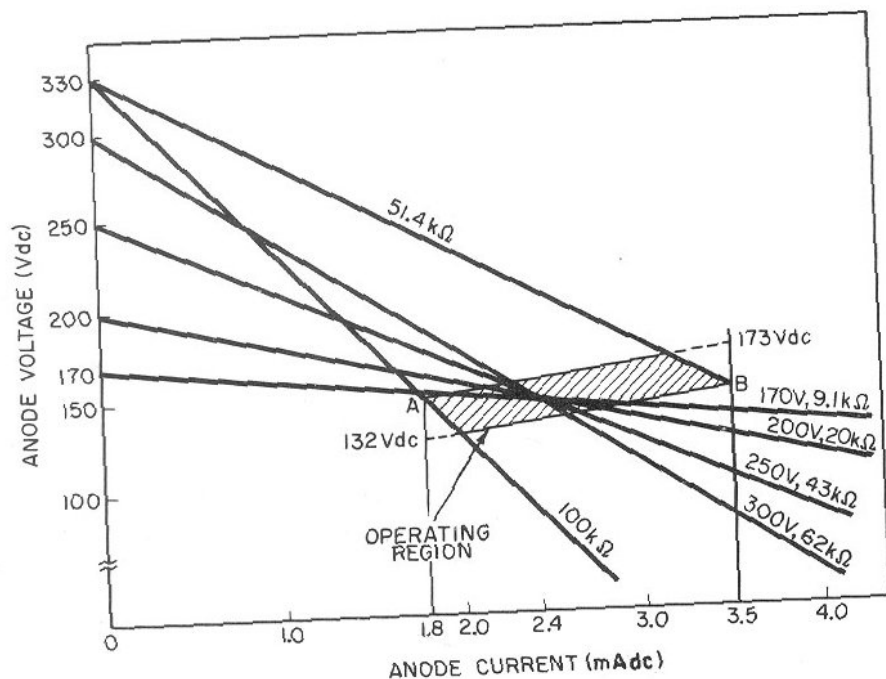

TUBE CHARACTERISTICS



PRINTED CIRCUIT MOUNTING HOLE LAYOUT
TOP VIEW

NATIONAL ELECTRONICS, INC.

a varian subsidiary
GENEVA, ILLINOIS, 60134

TELEPHONE 312 232-4300
TWX 910 237-1685