

PE51

PHOTO ELECTRIC CELL

GENERAL

The Mazda PE.51 is a Gas Filled Photo Electric Cell with a Caesium-Oxygen-Silver Cathode surface, having maximum sensitivity in the red and infra-red region of the spectrum.

RATING

Average Overall Sensitivity ($\mu\text{A}/\text{lumen}$)	100+
Average Primary Sensitivity ($\mu\text{A}/\text{lumen}$)	20*
Maximum Gas Amplification Factor	8.0\$
Maximum Working Voltage (volts)	90
Maximum Average Cathode Current (μA)	5.0‡
Maximum Peak Cathode Current (μA)	15
Maximum Peak Cathode Current Density ($\mu\text{A}/\text{sq cm}$)	15
Maximum Dark Current (μA)	0.1=
Minimum Insulation resistance between electrodes ($\text{M}\Omega$)	1,000

NOTES

* Measured at 0.05 lumens with lamp colour temperature 2700°K and a cell series resistance of 0.5.M Ω Anode Voltage = 90 volts

\$ Gas Amplification Factor is ratio of current at 90 volts to current at 25 volts under the conditions mentioned above.

= Measured at 90 volts with 0.5.M Ω series resistance: zero illumination.

‡ The Primary sensitivity is measured at an anode voltage of 25 volts at which ionisation has not taken place.

‡ Average over a period not greater than 30 secs.

All Maximum Ratings are Absolute values not Design Centres.

INTER-ELECTRODE CAPACITANCE

Anode to Cathode (μpF)	1.9
-------------------------------------	-----

PE51

PHOTO ELECTRIC CELL


DIMENSIONS

Max. Overall Length (mm)	78.0
Max. Seated Height (mm)	63.5
Light Centre from Seat (mm) (nominal)	41.0 $\pm$ 2.5
Max. Bulb Diameter (mm)	28.5
Max. Base Diameter (mm)	32.0
Cathode Length (mm)	22.0
Effective Cathode Width (mm)	21.5
Projected Cathode Area (sq.cm)	4.7
Approximate Nett Weight (oz)	1
Approximate packed weight (oz)	4 $\frac{1}{2}$

MOUNTING POSITION - Unrestricted

BASE Mazda Octal (B08)

Direction of Light




Viewed from free end of pins

CONNECTIONS

Pin 1	Cathode	k
Pin 2	+Internal Connection	l.c.
Pin 3	-	-
Pin 4	-	-
Pin 5	Anode	a
Pin 6	-	-
Pin 7	-	-
Pin 8	-	-

+ In use Pin 2 should be left free.

PE51
PHOTO ELECTRIC CELL

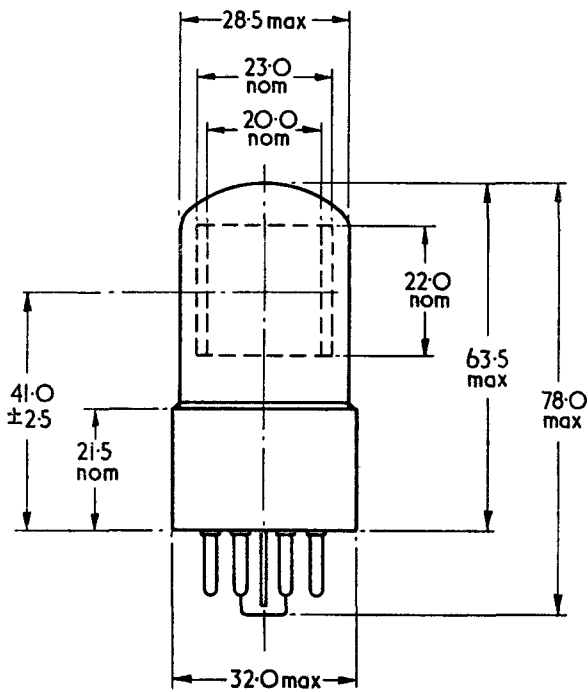

6-22 PE51-A-2

All dimensions in mm.