

U192/PY82 HALF WAVE RECTIFIER Indirectly heated—for series operation



GENERAL

The U192/PY82 is a miniature based Half Wave rectifier intended for use in AC/DC powered equipment having series connected heater chains.

RATING

Heater Current	I_h	0.3 A
Heater Voltage	V_h	19.0 V
Maximum Anode Voltage (r.m.s.)	$V_a(\text{rms})_{\text{max}}$	250 V
Maximum DC Output Current	$I_a(\text{max})$	180 mA
Maximum Peak Inverse Voltage	P.I.V.(max)	700 V
Maximum Reservoir Capacitor	C_{max}	60* μF
Maximum Anode Voltage (r.m.s.)	$V_a(\text{max})$	200 210 220 230 240 250 V ←
Minimum Surge Limiting Resistance (absolute)	R_{lim}	28.5 30 40 60 80 100 Ω ←
Maximum Heater/Cathode Voltage (peak, heater negative)	$v_{h-k}(\text{max})$	550†V

* Allowable tolerance +80%. When two U192 are parallel connected $C_{\text{max}}=100 \mu\text{F}$ and each anode must have a surge limiting resistor not less than the minimum value quoted in Typical Operation.

† Maximum AC 220 Vr.m.s. + Maximum DC 250 V measured with respect to the higher potential heater pin.

DIMENSIONS

Maximum Overall Length	78.5 mm
Maximum Diameter	22.2 mm
Maximum Seated Height	71.5 mm
Approximate Nett Weight	1.0 ozs
Approximate Packed Weight	2.0 ozs

Indicates a change ←


U192/PY82

HALF WAVE RECTIFIER

Indirectly heated—for series operation

MOUNTING POSITION—UnrestrictedTYPICAL OPERATION

DC Load Current	I_{out}	180 mA
DC Rectified Output	V_{out}	195 V
Reservoir Capacity	C	60 μF
Anode Voltage (r.m.s.)	V_a	200 210 220 230 240 250 V
Recommended Anode Surge Limiting Resistance	R_a	30 45 65 85 105 125 Ω

BASE—Noval (B9A)

Viewed from free end of pins.


CONNECTIONS

Pin 1	Internal Connection	IC
Pin 2	Internal Connection	IC
Pin 3	Cathode	k
Pin 4	Heater	h
Pin 5	Heater	h
Pin 6	Internal Connection	IC
Pin 7	Internal Connection	IC
Pin 8	Internal Connection	IC
Pin 9	Anode	a

Indicates a change ←

U192/PY82
HALF WAVE RECTIFIER
 Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVE : I_a/V_a

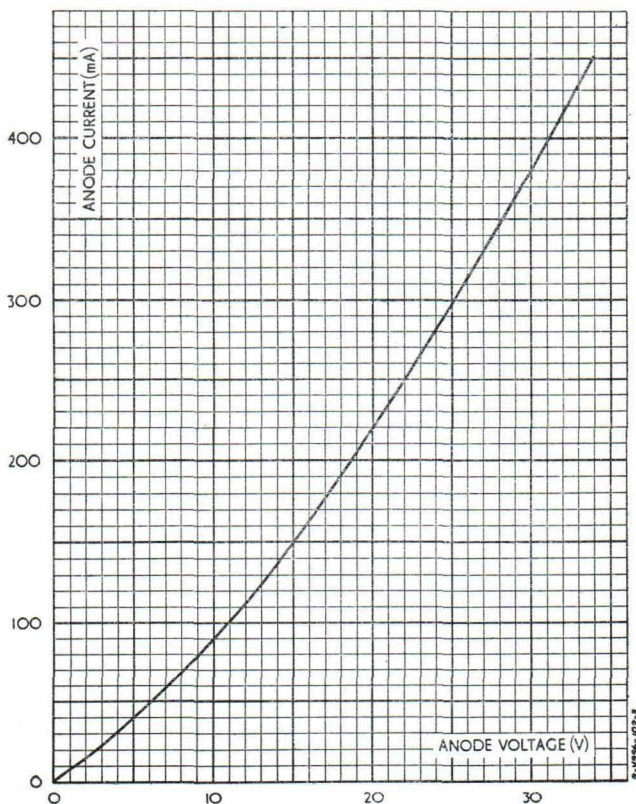

U192/PY82
HALF WAVE RECTIFIER
 Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVES : Regulation

$C = 60 \mu F$

