

TELEFUNKEN



REN 704 d



$V_f = 4 \text{ Volt}$

$J_f \sim 1 \text{ Amp.}$

$V_a \sim 8-20 \text{ Volt}$

$S \sim 1,5 \text{ mAmp/Volt}$

$g = \frac{1}{D} \sim 3$

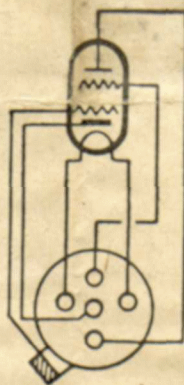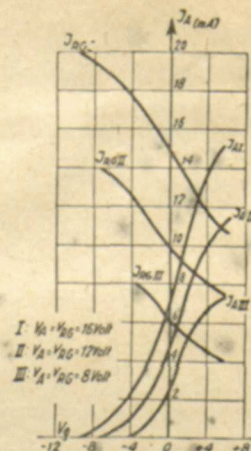

Zeichenerklärung

V_f = Fadenspannung
 V_a = Anodenspannung
 J_f = Heizstrom
 S = Steilheit
 g = Verstärkungsfaktor

Explanation of abbreviations

Filament tension
 Plate tension
 Filament current
 Slope, Mutual conductance
 Voltage amplification factor

Explication des abréviations

Tension de filament
 Tension de plaque
 Courant de filament
 Pente de la caractéristique
 Coefficient d'amplification

Alle Zahlen sind
 Annäherungswerte

All dates are
 approximate

Les chiffres donnés
 sont approximatifs