

DESCRIPTION

The Sylvania SC-3016 is an electrostatic focus and deflection cathode ray tube, with a flat face $1\frac{1}{8}$ inches in diameter, designed for compact equipments. The electron gun features high deflection sensitivity as well as the newly developed 1.5 volts - 140 ma. heater-cathode assembly. Any standard phosphor can be supplied.

The SC-3016 is cylindrical in shape, $1\frac{1}{8}$ inches in diameter. An anode connection is brought out through the bulb and terminated in a standard J1-25 button. The cathode is internally connected to one leg of the heater. All deflection plate leads are brought out independently through the base.

ELECTRICAL CHARACTERISTICS



Ratings	Ef V	Ec1 Vdc	Eb1 Vdc	Eb2 Vdc	Ed V	Altitude Feet
Absolute Maximum	$1.5 \pm 10\%$	0	1100	2750	550	10,000
Absolute Minimum	—	-200	—	—	—	(Note 1)
Test Conditions	1.5	adj.	focus	1200	—	—
Characteristics			Condition	Approximate Values		
Heater Current			1.5V	$140 \pm 10\%$ Ma		
Angle Between Traces			—	$90^\circ \pm 1^\circ$		
Line Width A			Note 2	0.4 mm Max.		
Grid Cutoff Voltage			—	-45 Vdc Max.		
Focus Voltage			Note 2	200-400 Vdc		
Deflection Factor, 1D2			—	$124 \pm 15\%$ Vdc/in.		
Deflection Factor, 3D4			—	$49 \pm 15\%$ Vdc/in.		

NOTES:

1. A nominal rating of 10,000 feet has been specified. If higher values are required, additional insulation can be incorporated such that 50,000 feet can be attained.
2. Measured at a grid drive of 15 volts above spot cutoff voltage.

QUICK REFERENCE DATA

$1\frac{1}{8}$ " Direct Viewed
Round Glass Type
Flat Face
Electrostatic Deflection
Electrostatic Focus
Very Low Heater Power
High Deflection Sensitivity

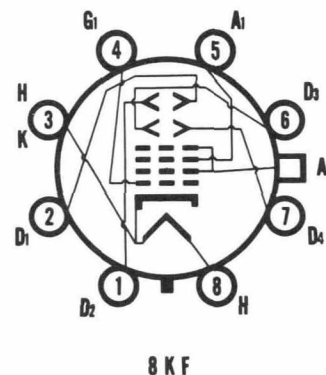

SYLVANIA ELECTRIC
PRODUCTS INC.

Electronic Components Group
ELECTRONIC TUBE DIVISION
SENECA FALLS, NEW YORK

A Technical Publication



JULY, 1965

PAGE 1 OF 2

File Under

SPECIAL AND GENERAL
PURPOSE CATHODE RAY TUBES

OUTLINE

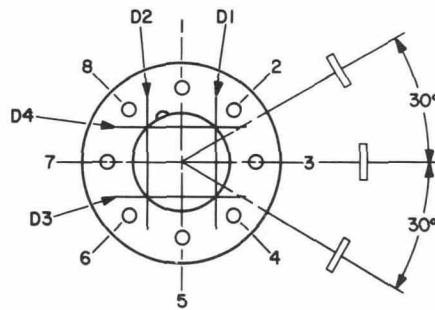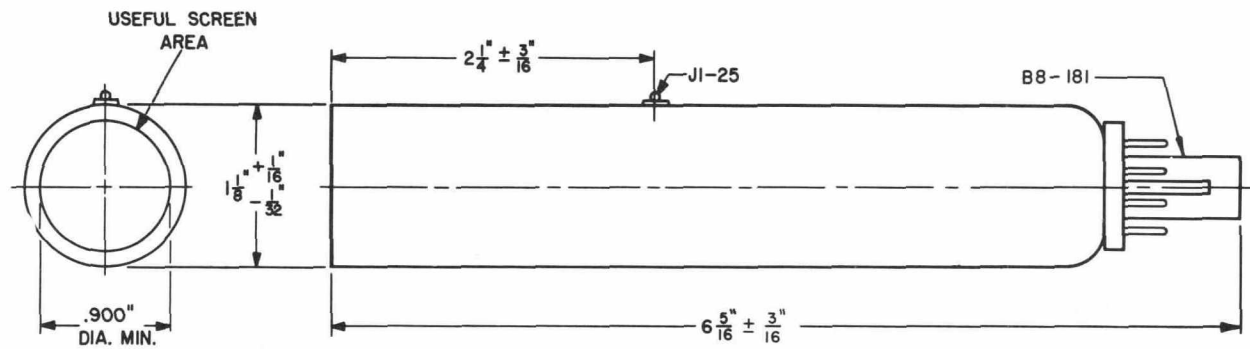

BOTTOM VIEW OF BASE

D60036B