



DESCRIPTION

The Sylvania SC-3525 is a 2-gun, electrostatically focused and deflected cathode-ray tube for displaying simultaneously two independently controlled traces. It features linear post deflection acceleration for maximum pattern linearity and deflection factor uniformity. All deflection plate leads are brought through the neck. The screen is aluminized for high brightness. Potted, flying leads are used in place of a conventional base to minimize overall length.

CHARACTERISTICS

GENERAL DATA¹

Focusing Method	Electrostatic
Deflection Method	Electrostatic
	SC-3525 SC-3525 SC-3525 SC-3525
Types*	P1 P2 P7 P11
Fluorescence	Green Blue-Green Blue Blue
Phosphorescence	— Green Yellow —
Persistence	Medium Long Long Short

*In addition to the types shown, the SC-3525- can be supplied with several other screen phosphors.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (2 Guns in Parallel)	1.08 to 1.32 Amperes
Direct Interelectrode Capacitances (Approx.)**	

	Each Gun
Cathode to All	5.5 pf
Grid No. 1 to All	6.5 pf
D1 to D2	2.0 pf
D3 to D4	2.0 pf
D1 to All Other Electrodes	7.0 pf
D2 to All Other Electrodes	7.0 pf
D3 to All Other Electrodes	7.0 pf
D4 to All Other Electrodes	7.0 pf

**Exclusive of the basing leads.

MECHANICAL DATA


Overall Length	11 $\frac{5}{8}$ $\pm$ $\frac{3}{8}$ Inches
Minimum Useful Screen Dimensions	2 $\frac{1}{4}$ x 4 $\frac{1}{8}$ Inches
Bulb Contact (Recessed Small Ball Cap)	J1-22
Basing	See Diagram
Base and Contact Alignment	See Diagram
Trace Alignment	
D1-D2 Trace Aligns with D3-D4 Trace (Each Gun)	90 $\pm$ 1 Degree
D1-D2 and D3-D4 Traces of the 2 Guns are Parallel	$\pm$ 1 Degree

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Input	6 Watts
Anode No. 3 Voltage	7260 Volts dc
Anode No. 2 Voltage	3630 Volts dc
Ratio to Anode No. 3 Voltage to Anode No. 2 Voltage	2.4:1
Anode No. 1 (Focus Electrode) Voltage	1650 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	220 Volts dc
Positive Bias Value	0 Volt dc
Positive Peak Value	2 Volts dc
Peak Heater to Cathode Voltage	
Heater Negative with Respect to Cathode	200 Volts
Heater Positive with Respect to Cathode	200 Volts
Peak Voltage Between Anode and Astigmatism Electrode, or Any Deflecting Plate	750 Volts

QUICK REFERENCE DATA

Two Independent Guns
 5 $\frac{1}{4}$ " x 3 $\frac{1}{4}$ " Direct Viewed
 Oscilloscope Tube
 Aluminized Screen
 Spiral Accelerator
 Rectangular Glass Type
 Electrostatic Focus
 Electrostatic Deflection
 Compact Size
 All Deflection Plate and Acceleration Leads Brought Through the Neck Wall



FOR BASING
 SEE PAGE 3

SYLVANIA
 ELECTRONIC TUBES

A Division of
 Sylvania Electric Products Inc.

PICTURE TUBE
 OPERATIONS

SENECA FALLS, NEW YORK

Prepared and Released By The
 TECHNICAL PUBLICATIONS SECTION
 EMPORIUM, PENNSYLVANIA

DECEMBER, 1963

PAGE 1 OF 3

File Under
 SPECIAL AND GENERAL
 PURPOSE CATHODE RAY TUBES

TYPICAL OPERATING CONDITIONS

Anode No. 3 Voltage	6000 Volts	dc
Anode No. 2 Voltage	2750 Volts	dc
Focus Electrode Voltage	730-540 Volts	dc
Grid No. 1 Voltage ²	-66 to -110 Volts	dc
Line Width "A" ³	0.018 Inches	Max.
Deflection Factors		
D1-D2	154-193 Volts Per Inch	
D3-D4	117-152 Volts Per Inch	
Deflection Factor Uniformity ⁴	3 Percent	Max.
Undelected Spot Positions ⁵	Within $\frac{5}{8}$ Inch Square	
Useful Scan ⁶		
D1-D2	± 1.12 Inches	
D3-D4	± 2.06 Inches	
Interaction Factor ⁷	5 x 10 ⁻⁵ In./Volts	Max.
Pattern Distortion ⁸		
Maximum Ib ₃ at Cutoff	40 μ adc	

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms	Max.
Deflection Circuit Resistance	1.0 Megohm	Max.



NOTES:

1. Values are for each gun unless otherwise specified.
2. Visual extinction of undeflected focused spot.
3. Per MIL-E-1 and at Ib₃ of 25 μ a. (This current shall be in addition to the value of Ib₃ read at cutoff.)
4. The deflection factor (for both D1-D2 and D3-D4 plate pairs separately) for a deflection of 75 % of the minimum useful scan will not differ from the deflection factor at 25 % of the minimum useful scan by more than the indicated value.
5. The shielded, undeflected focused spots will fall within a $\frac{5}{8}$ " square, the center of which coincides with geometric center of the tube face and the sides of which are parallel to the deflection axes.
6. Useful scan shall be measured from the center of the square as specified in Note 5 for spot centering.
7. The deflection of one beam when balanced dc voltages are applied to the deflection electrodes of the other gun shall be less than the specified value.
8. All portions of a raster pattern adjusted so its widest points just touch the sides of a 4.05 x 2.05 inch rectangle will fall within the area bounded by the 4.05 x 2.05 rectangle and an inscribed 3.95 x 1.95 rectangle.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

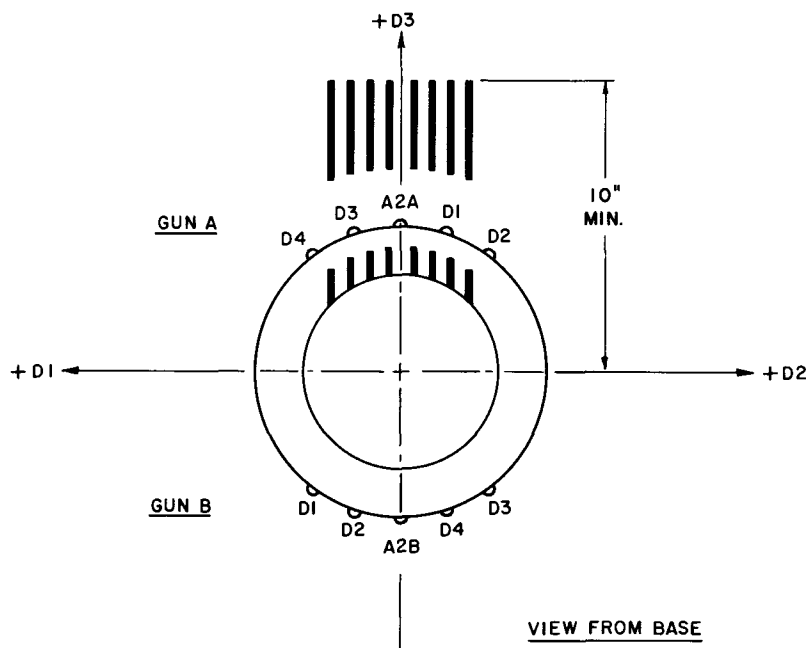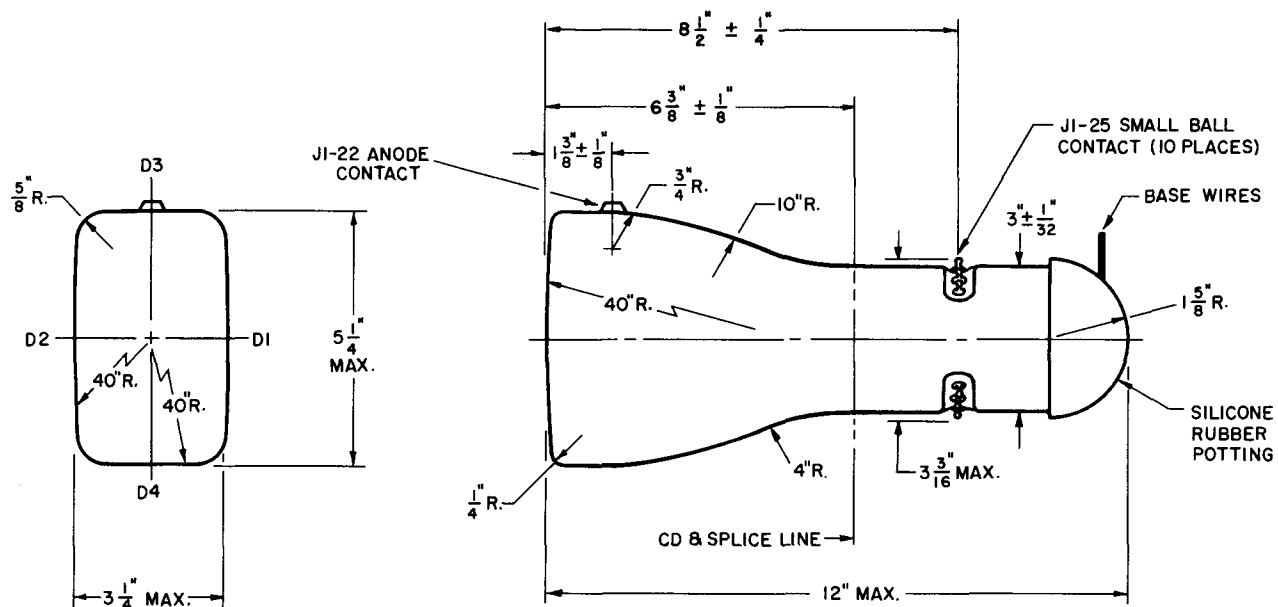

BASE WIRE COLOR CODE
From
LEFT to RIGHT

BLACK	-----	H
BROWN	-----	H
YELLOW	-----	K-A
GREEN	-----	GI-A
ORANGE	-----	AI-A
RED	-----	AI-B
BLUE	-----	GI-B
WHITE	-----	K-B

D63037