
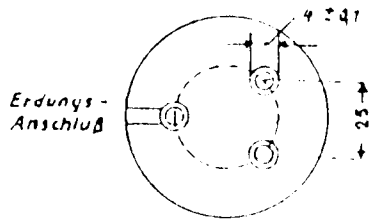


TS 4 Sp.

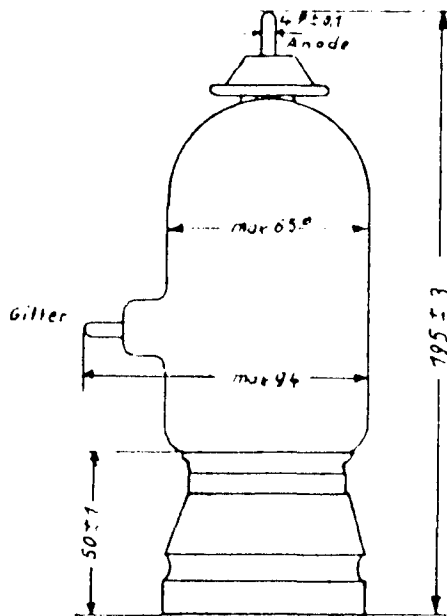

Heizspannung (auf $\pm 3\%$ einst.)

$U_h = 10,5 \text{ Volt}$

Heizstrom

$J_h \text{ ca. } 10,5 \text{ Amp}$

Durchgriff gem. b. $J_a = 125 \text{ mA}$
 $U_a = 1/2 \text{ KV}$

$D = 7 \div 10 \%$

Steilheit " " $U_a = 1 \text{ KV}$
 $J_a = 250/300 \text{ mA}$

$S_{\min} = 6,5 \text{ mA/V}$

Gitterstr. " " $J_a = 20 \text{ mA}$
 $U_h = < 10,5 \text{ V}$

$J_g = 0 \div +25 \text{ mA}$

max Anodenverlustleistung

$N_v = 150 \text{ W}$

Kapazitäten Gitter/Anode $\frac{K}{\pm}$


$C_{g/a} = 4,7 \div 4,25 \text{ pF}$

Gitter/Kathode $\frac{A}{\pm}$

$C_{g/k} = 4,4 \div 4,75 \text{ pF}$

Anode/Kathode $\frac{G}{\pm}$

$C_{a/k} = 0,9 \div 1,1 \text{ pF}$

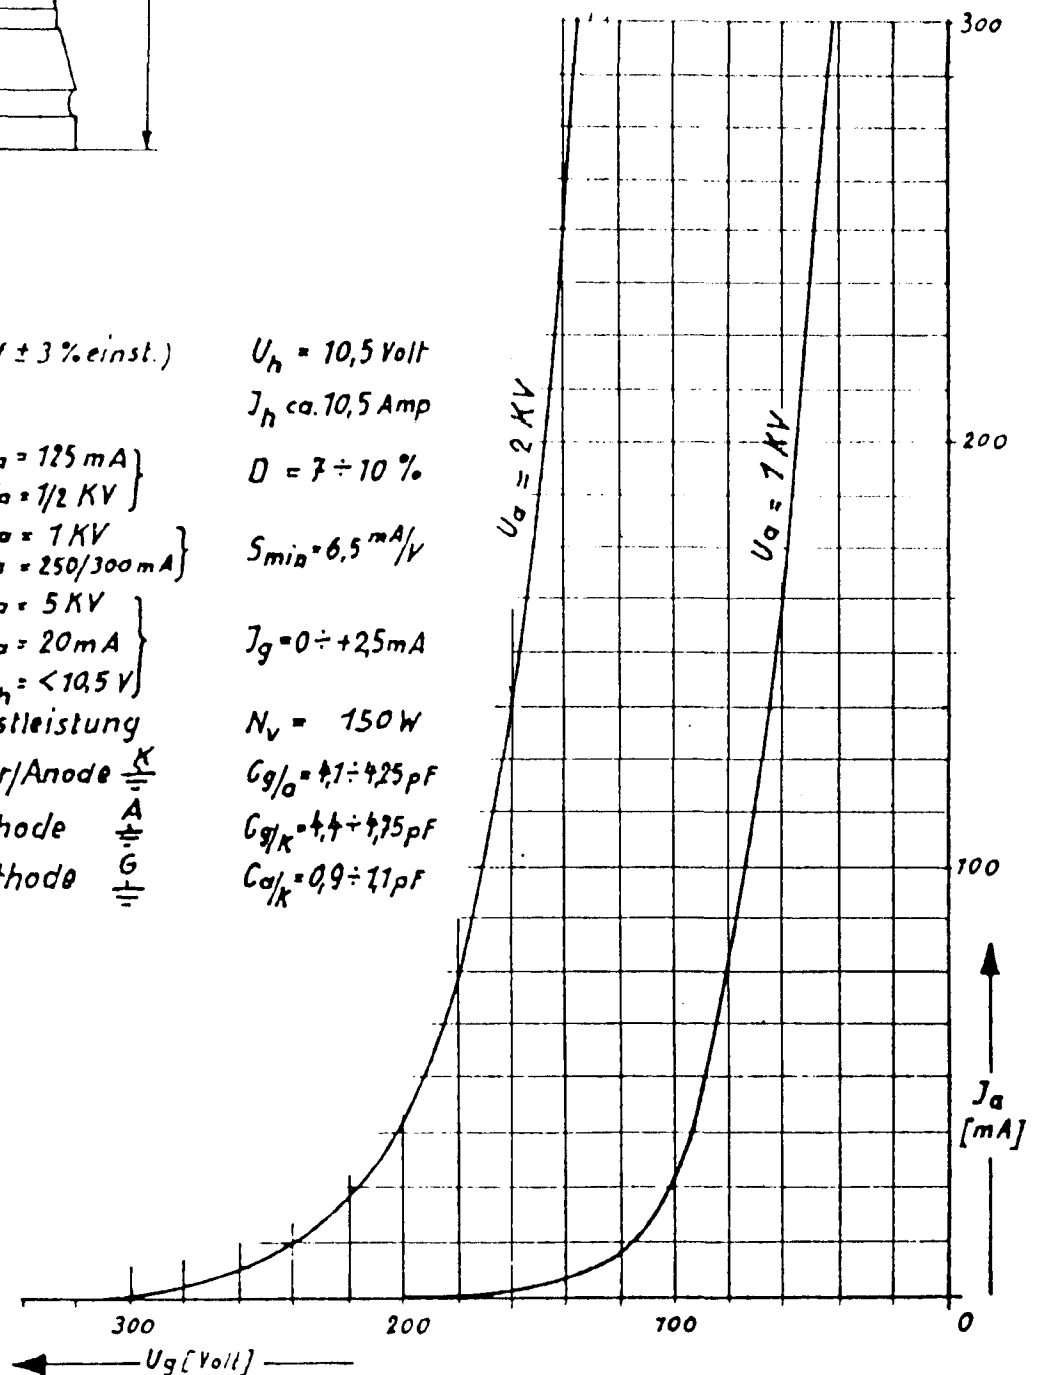

VII A6P5 Pri. 24.6.41