

EDISWAN

U.235

FULL WAVE GAS DISCHARGE RECTIFIERGENERAL

Type U.235 is a full wave gas discharge rectifier suitable for use in low voltage charging circuits.

RATING

Filament Voltage (volts)	V_f	2.0
Filament Current (amps)	I_f	3.5
D.C. Output	20 volts	2 amps

DIMENSIONS

Maximum Overall Length (including Pins) (mm)	110
Maximum Diameter (mm)	45
Approximate Nett Weight (ozs)	1½
Approximate Home Packed Weight (ozs)	2½
Approximate Export Packed Weight (ozs)	4

MOUNTING POSITION - Vertical



U.235

EDISWAN

U.235

FULL WAVE GAS DISCHARGE RECTIFIER

U.235

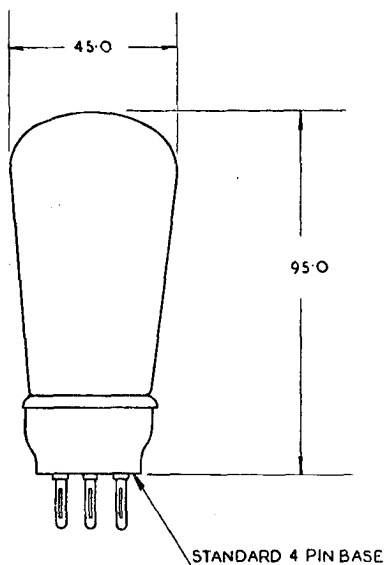

ALL DIMS IN m.m. UNLESS
STATED OTHERWISE