

High-vacuum HALF-WAVE RECTIFIERS
REDRESSEURS MONOPLAQUE à vide poussé
Hochvakuum EINWEGGLEICHRICHTER


Heating : indirect by A.C. or D.C.;
series supply
Chauffage : indirect par C.A. ou C.C.; $V_f = 31 \text{ V}$
alimentation- série $I_f = 100 \text{ mA}$
Heizung : indirekt durch Wechsel-
oder Gleichstrom; Serien-
speisung

Base, culot, Sockel: RIMLOCK

Overall length: 67 mm
See pages 203 and 252

Hauteur totale: 67 mm
Voir pages 203 et 252

Gesamthöhe : 67 mm
Siehe S. 203 und 252



Operating characteristics
Caractéristiques d'utilisation
Betriebsdaten

V_i	=	110	127	220	250 V_{eff}
I_o	=	100	100	100	100 mA
C_{filt}	=	50	50	50	50 μF
R_t	=	0	0	160	210 Ω
V_o	=	113	135	188	205 V

Limiting values
Caractéristiques limites
Grenzdaten


V_{invp}	= max.	700 V
I_o	= max.	100 mA
I_{ap}	= max.	600 mA
V_{kf_p} (k pos., f neg.)	= max.	550 V

V_i	=	110	127	220	250 V
R_t	=min.	0	0	160	210 Ω



PHILIPS

UY 41
UY 42

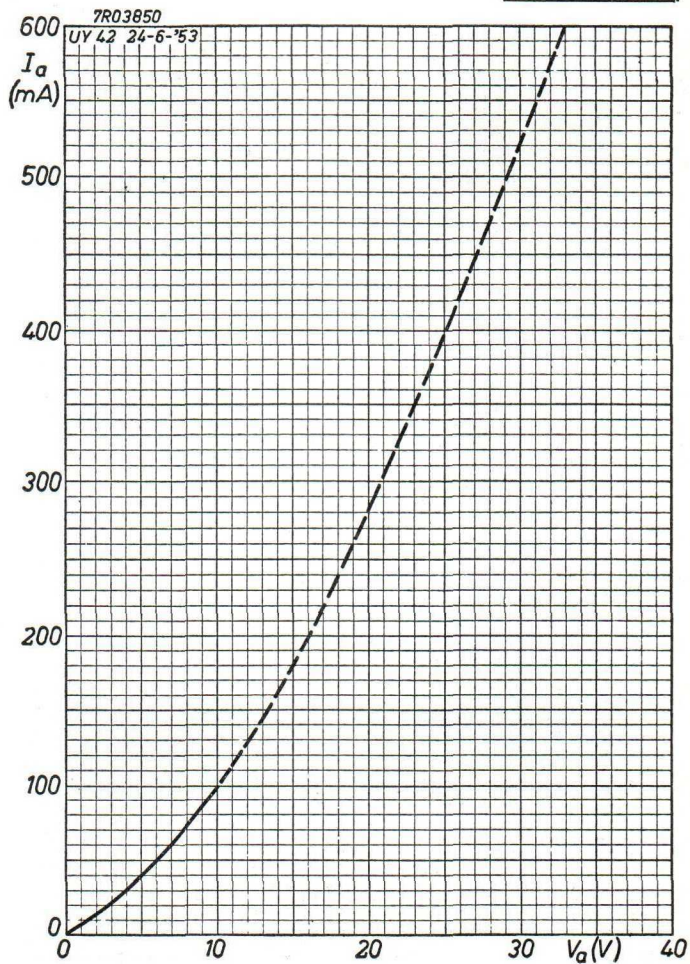

12.12.1953

A

UY 41
UY 42

PHILIPS

7R03851

UY 42 24-6-53

