

INDICATOR TUBE

Cold cathode sign indicator tube for side viewing.

QUICK REFERENCE DATA

Sign height		15	mm
Signs		+ -	
Supply voltage	V_{ba}	min. 170	V
Cathode current	I_k	4	mA

GENERAL

This tube has the same physical dimensions as the biquinary numerical indicator tube ZM1030. The ZM1031 is provided with a red contrast filter.

PRINCIPLE OF OPERATION


The tube contains two anodes and two cathodes separated by a shield. The rear compartment contains the minus (-) sign and the rear anode, the front compartment contains the plus (+) sign and the front anode.

By applying a suitable voltage between the required sign and the corresponding anode, the sign will be covered by a red neon glow.

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

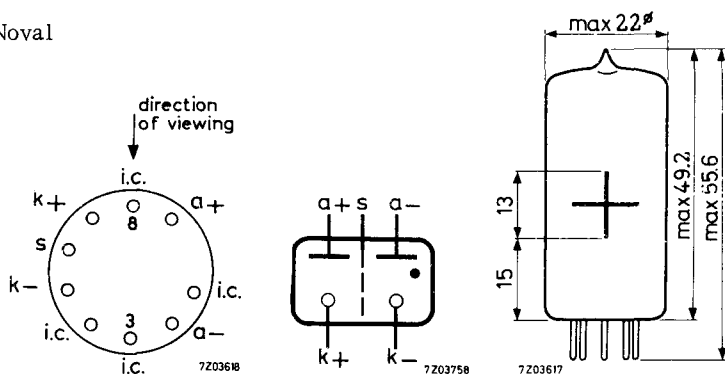

Mounting position: any

The signs are viewed through the side of the envelope.


7Z2 5252

CHARACTERISTICS AND OPERATING CONDITIONS

Ignition voltage	V_{ign}	< 170 V
Maintaining voltage at $I_k = 4$ mA	V_m	140 V
Anode current,		
average during any conduction period for coverage	I_a	> 2 mA
average, $T_{av} = 20$ ms	I_a	< 5 mA
peak	I_{ap}	< 10 mA
Incremental resistance	r_a	4.5 k Ω


Typical operation at temperatures $t_{amb} = 10$ to 50 °C

I. with anode switches



Shield supply voltage	V_{bs}	50 V
Shield series resistance	R_s	10 k Ω
"Off" anode voltage	$V_{a'}$	90 to 110 V

II. with cathode switches



Cathode selecting voltage	V_{kk}	40 to 70 V
---------------------------	----------	------------

LIMITING VALUES (Absolute max. rating system)

Anode voltage necessary for ignition	V_a	min.	170 V
Anode current,			
average during any conduction period	I_a	min.	2 mA
average ($T_{av} = 20$ ms)	I_a	max.	5 mA
peak	I_{ap}	max.	10 mA
Bulb temperature	t_{bulb}	min.	-55 °C ¹⁾
		max.	+70 °C

¹⁾ Below 10 °C the life expectancy is substantially reduced.

