



ELECTRONIC
INNOVATIONS
IN ACTION

TUBES

OBJECTIVE TECHNICAL INFORMATION

These ratings represent the design objective for this product. Refer to the Preliminary Technical Information sheet for ratings currently achieved in the progression towards design objectives. If PTI sheets do not exist, consult your local Tube Department Regional Sales Office.

DEVELOPMENTAL TYPE

ZM-6244
OTI-111A
Page 1
9-67

This technical information is proprietary and is furnished only as a service to customers

ZM-6244

PACKAGED VOLTAGE-TUNABLE MAGNETRON

2600-3200 Megacycles

Integral Magnet and Isolator

100 Watts Minimum CW Output

The ZM-6244 is a magnetically shielded voltage-tunable oscillator which operates at a minimum power output of 100 watts over the 2600 to 3200-megacycle range. It is designed for CW/FM transmitting-tube operation at low- or high-modulation frequencies. The high efficiency allows air cooling to be used and in many applications heat-sink cooling is adequate. The integral isolator protects the tube against load mismatches thus minimizing interface problems between the VTM and its associated equipment.

This shielded tube is unaffected by passive magnetic materials and does not require the special tools, storage and handling necessitated by conventional electron devices employing magnetic fields. It is a complete radio-frequency power source which requires only d-c input power and generates radio-frequency power over its electronically tuned frequency range. This voltage-tuned magnetron may be operated over a portion or all of the frequency range or operated at a fixed frequency. Its frequency versus voltage-tuning characteristic is essentially linear.

GENERAL

Electrical

Cathode (filament) - Directly Heated

Warm-up Time, maximum 10 Seconds

Cathode Input Capacitance

Maximum 35 μ f

Typical 32 μ f

Mechanical

Mounting Position Any

Net Weight 5.5 Pounds

Thermal

Cooling - Forced Air *

Air Temperature, maximum 110 C

Body Temperature, maximum † 125 C

MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS

Maximum Ratings, Absolute Values

Filament Voltage	2.5	Volts
Filament Current ‡	6.0	Amperes
Anode Voltage	3800	Volts
Sweep Voltage	700	Volts
Anode Current, swept	80	Milliamperes
Power Input	250	Watts
Injection Electrode Voltage	1500	Volts
Voltage Standing Wave Ratio of Load **	2.0	

Typical Operating Conditions

Operation with 60-cycle Sweep Voltage

Filament Voltage, approximate	2.3	Volts
Filament Current ‡	5.3	Amperes
Sweep Frequency Range	2600 to 3200	Megacycles
Sweep Voltage, Peak to Peak, typical	600	Volts
Anode Voltage at 3.05 Gigacycles	3300	Volts
Anode Current	65	Milliamperes
Injection Electrode Voltage, positive with respect to cathode	700 to 1500	Volts†
Injection Electrode Current, may be either polarity but less than	0.5	Milliamperes

MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS (Cont'd.)

Typical Operating Conditions (Cont'd.)

Operation with 60-cycle Sweep Voltage (Cont'd.)

Power Output

Average, Swept Across Full Band 110 Watts ***

Minimum, At Any Point Without Sweep Voltage 100 Watts ***

Variation Across Band

Typical 1.4 Decibels

Maximum 2.0 Decibels

Efficiency, minimum

At Any Frequency 50 Percent

Swept Across Full Band 60 Percent

* Hold temperature to 125 C or less at point shown on the outline drawing. At the maximum inlet temperature of 110 C, 100 cubic feet per minute is required but this drops rapidly for lower inlet temperatures.



† Measured at point shown on the outline drawing.

‡ Set to value marked on tube within ± 0.1 ampere.

¶ Set to give anode current marked on tube within ± 2 milliamperes.

** With integral isolator. Without isolator maximum allowable VSWR is 1.2 to 1.

*** Measured with load VSWR < 1.2 ; for loads between 1.2 and 2.0 VSWR the power output is diminished by the amount reflected, plus a positive or negative change due to residual pulling. At 2.0 VSWR the theoretical reduction at the worst load phase is down to 85 percent, and the guaranteed performance is not less than 75 percent of rated power.

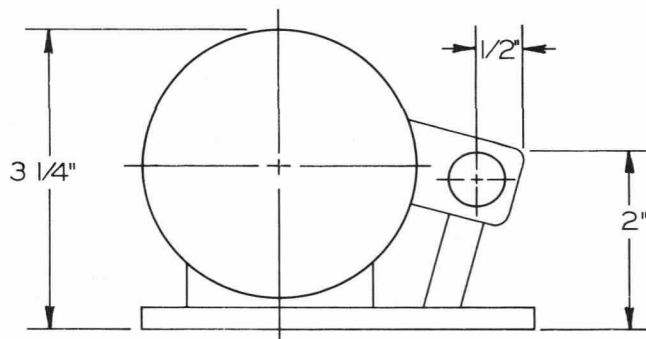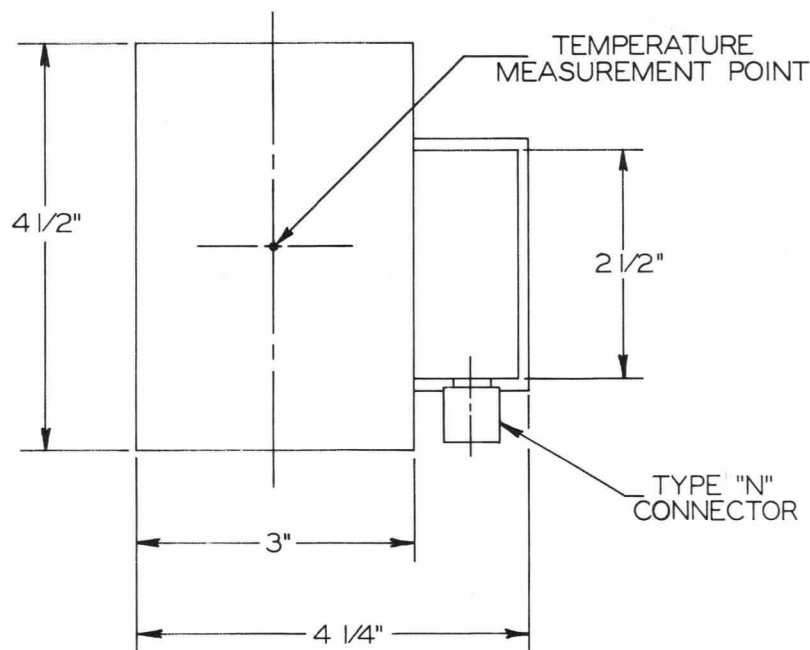

TUBE DEPARTMENT

GENERAL  ELECTRIC

Schenectady, N. Y. 12305