

ELECTRONIC TUBE REFERENCE

6LQ6

Power - TV Horizontal Output (sweep) electronic tube

CONSOLIDATED TECHNICAL DATA
1 SECTION
CONSTRUCTION
BEAMPOWER

Heavy-duty Novar beam-power tube for horizontal-deflection output in color and monochrome televisions, with approximately 30 W plate dissipation and high pulse-current capability.

GENERAL CHARACTERISTICS

BASE DESIGNATION	9QL	BASE PINS	9
NOMINAL HEATER	6.3 V / 2.3 A	PARALLEL HEATER	– / –
HEATING	Indirect	SERIES OPERATION	Not specified
CATHODE ARRANGEMENT	Separate cathodes	SECTION CONSTRUCTION	Similar

9QL - TERMINAL PINOUT

TERMINAL	SECTION	ELEMENT	STATUS
PIN1	–	G2 – Screen Grid	CONNECTED
PIN2	–	G1 – Control Grid	CONNECTED
PIN3	–	K – Cathode	CONNECTED
PIN4	–	H – Heater	CONNECTED
PIN5	–	H – Heater	CONNECTED
PIN6	–	G1 – Control Grid	CONNECTED
PIN7	–	G2 – Screen Grid	CONNECTED
PIN8	–	G3 – Suppressor Grid	CONNECTED
PIN9	–	–	IC
CAP1	A	P – Plate (Anode)	CONNECTED

SECTION RATINGS

SECTION1 Beam Power	
PLATE RESISTANCE	5800 Ω
TRANSCONDUCTANCE	0.009 S
AMPLIFICATION FACTOR	34
MAXIMUM PLATE VOLTAGE	990 V
MAXIMUM SCREEN VOLTAGE	220 V
MAXIMUM PLATE DISSIPATION	30 W
MAXIMUM SCREEN DISSIPATION	5 W
MAXIMUM CATHODE CURRENT	350 mA
<i>Published promoted values applied where applicable; additional ratings, characteristics, and operating data retained as parameters.</i>	

Novar beam-power tube used as a horizontal-deflection amplifier in color and black-and-white television receivers.



SOURCE OPERATING CONDITIONS

[SOURCE PDF](#)

1968 General Electric Co

Published test conditions and operating points. Values on this page are preserved as reported by this source.

1968 GENERAL ELECTRIC CO

Section 1 · Beam Power

OTHER		
PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Maximum Plate Voltage	990 V	—
Maximum Screen Voltage	220 V	—
Maximum Plate Dissipation	30 W	—
Maximum Screen Dissipation	5 W	—
Maximum Cathode Current	350 mA	—
Peak Positive Pulse Plate Voltage	7500 V	—

CHARACTERISTIC		
PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Plate Resistance	5800 ohm	—
Transconductance	9000 uS	—
Amplification Factor	34	—



SOURCE OPERATING CONDITIONS

[SOURCE PDF](#)

1971 RCA HB3 Binder 5 of 7

Published test conditions and operating points. Values on this page are preserved as reported by this source.

1971 RCA HB3 BINDER 5 OF 7


Section 1 · Beam Power

CHARACTERISTICS		
PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Pb = 30 W – published value 1	30	Published datasheet value; multiple values represent separate source-table limits or conditions.
Pb = 30 W – published value 2	200	Published datasheet value; multiple values represent separate source-table limits or conditions.
Heater Voltage, ac or dc	6.3 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Heater Current	2.5	Published datasheet value; multiple values represent separate source-table limits or conditions.
Transconductance – published value 1	9600	Published datasheet value; multiple values represent separate source-table limits or conditions.
Transconductance – published value 2	7500	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Current – published value 1	580 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Current – published value 2	130 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Current – published value 3	710 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Current – published value 4	95 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Current Ic2 – published value 1	40 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Current Ic2 – published value 2	2.8 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Current Ic2 – published value 3	55 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.

PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
DC Clod-No.2 Current Ic2 – published value 4	2.4 mA	Published datasheet value; multiple values represent separate source-table limits or conditions.
Voltage far Ib =1 mA Ecl(co) -120 – published value 1	-120 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Voltage far Ib =1 mA Ecl(co) -120 – published value 2	-54 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Voltage far Ib =1 mA Ecl(co) -120 – published value 3	-125 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Voltage far Ib =1 mA Ecl(co) -120 – published value 4	-60 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Heater Voltage	6.3 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Plate Voltage – published value 1	5000 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Plate Voltage – published value 2	5000 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Voltage – published value 1	55 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Voltage – published value 2	175 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Voltage – published value 3	60 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Voltage – published value 4	175 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Grid-No.3 Voltage Ec3 – published value 1	30 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Grid-No.3 Voltage Ec3 – published value 2	30 V	Published datasheet value; multiple values represent separate source-table limits or conditions.

PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
DC Grid-No.3 Voltage Ec3 – published value 3	30 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Grid-No.3 Voltage Ec3 – published value 4	30 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Voltage Ec2 – published value 1	125 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Voltage Ec2 – published value 2	145 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Voltage Ec2 – published value 3	145 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Clod-No.2 Voltage Ec2 – published value 4	145 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC Plate Supply Voltage	990 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Peak Positive-Pulse Plate Voltage"	7500 V	Pulse
Peak Negative-Pulse Plate Voltage	1100 V	Pulse
DC Chid-No.3 Voltage"	75 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC 4id-No.2 (Screen-Grid) Voltage – published value 1	4 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
DC 4id-No.2 (Screen-Grid) Voltage – published value 2	220 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
(Control-Grid) Voltage	330 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Heater Voltage, ac or do – published value 1	5.7 V	Published datasheet value; multiple values represent separate source-table limits or conditions.
Heater Voltage, ac or do – published value 2	6.9 V	Published datasheet value; multiple values represent separate source-table limits or conditions.

PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Grid-No.2Input	5	Published datasheet value; multiple values represent separate source-table limits or conditions.
Plate DissipationP	30	Published datasheet value; multiple values represent separate source-table limits or conditions.
Far grid-No. 1-resistcx-ias operation – published value 1	0.47	Published datasheet value; multiple values represent separate source-table limits or conditions.
Far grid-No. 1-resistcx-ias operation – published value 2	2	Published datasheet value; multiple values represent separate source-table limits or conditions.
Pin 1 -Grid No.2	1	Published datasheet value; multiple values represent separate source-table limits or conditions.
Pin 2 -Grid No.1	2	Published datasheet value; multiple values represent separate source-table limits or conditions.
Pin 3 -Cathode	3	Published datasheet value; multiple values represent separate source-table limits or conditions.
Pin 4 -Heater	4	Published datasheet value; multiple values represent separate source-table limits or conditions.
Pin 5 -Heater	5	Published datasheet value; multiple values represent separate source-table limits or conditions.

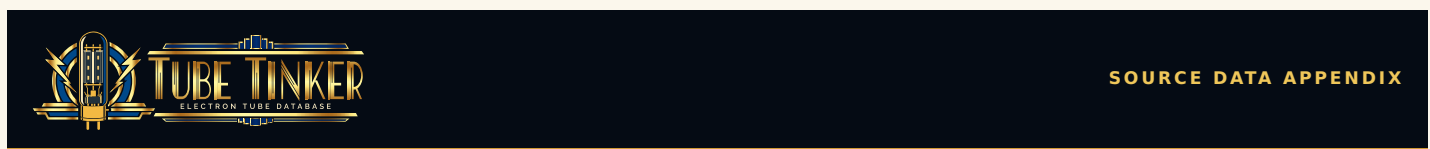

SOURCE OPERATING CONDITIONS

[SOURCE PDF](#)

1975 RCA RC30

Published test conditions and operating points. Values on this page are preserved as reported by this source.

1975 RCA RC30

Section 1 · Beam Power

OTHER		
PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
For plate dissipation more than	1.2 W	Published in approved 31LQ6 target datasheet entry; Section1

PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
For plate dissipation more than 1.2 watts	0.5 W	Published in approved 31LQ6 target datasheet entry; Section1
For plate dissipation less than 1.2 watts	0.75 W	Published in approved 31LQ6 target datasheet entry; Section1
For fixed-bias operation 0.5	0.5 MΩ	Published in approved 31LQ6 target datasheet entry; Section1
For cathode-bias operation 0.5	1 MΩ	Published in approved 31LQ6 target datasheet entry; Section1
Heater Current 6.3 24	31 V	Published in approved 31LQ6 target datasheet entry; Section1
Heater Warm-up Time 2.3 0.6	450 mA	Published in approved 31LQ6 target datasheet entry; Section1
Heater-Cathode Voltage 11	11 seconds	Published in approved 31LQ6 target datasheet entry; Section1
of	1 mA	Published in approved 31LQ6 target datasheet entry; Section1
Plate Supply Voltage	990 V	Published in approved 31LQ6 target datasheet entry; Section1
Peak Positive-Pulse Plate Voltage#	7500 V	Published in approved 31LQ6 target datasheet entry; Section1
Peak Negative-Pulse Plate Voltage	1100 V	Published in approved 31LQ6 target datasheet entry; Section1
Grid-No.3 Voltage"	75 V	Published in approved 31LQ6 target datasheet entry; Section1
Grid-No.2 Voltage	220 V	Published in approved 31LQ6 target datasheet entry; Section1
Peak Negative-Pulse Grid-No.1 Voltage	330 V	Published in approved 31LQ6 target datasheet entry; Section1
Peak Cathode Current	1200 mA	Published in approved 31LQ6 target datasheet entry; Section1
Average Cathode Current	350 mA	Published in approved 31LQ6 target datasheet entry; Section1
Plate Dissipation0	30 W	Published in approved 31LQ6 target datasheet entry; Section1
Plate Dissipation (Temporary overload)*	200 W	Published in approved 31LQ6 target datasheet entry; Section1
Grid-No.2 Input	5 W	Published in approved 31LQ6 target datasheet entry; Section1
Envelope Temperature (At hottest point)	250 °C	Published in approved 31LQ6 target datasheet entry; Section1

PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
For grid-No. 1-resistor-bias operation	0.47 MΩ	Published in approved 31LQ6 target datasheet entry; Section1
For plate-pulsed operation (horizontal-deflection circuits only)	10 MΩ	Published in approved 31LQ6 target datasheet entry; Section1
# Pulse duration must not exceed 15% of a horizontal scanning cycle (	10 microseconds	Published in approved 31LQ6 target datasheet entry; Section1
"snivels" interference in both vhf and uhf television receivers. A typical value is	30 V	Published in approved 31LQ6 target datasheet entry; Section1
A Total continuous or accumulated time not to exceed	40 seconds	Published in approved 31LQ6 target datasheet entry; Section1
Heater Voltage	6.3 V	Published in approved 31LQ6 target datasheet entry; Section1
Heater Current	900 mA	Published in approved 31LQ6 target datasheet entry; Section1

CAPACITANCE		
PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Grid No.1 to Plate	0.6 pF	Published in approved 31LQ6 target datasheet entry; Section1
and Grid No.3	22 pF	Published in approved 31LQ6 target datasheet entry; Section1
and Grid No.3	11 pF	Published in approved 31LQ6 target datasheet entry; Section1
Grid to Plate 2.8 2.8	2.8 pF	Published in approved 31LQ6 target datasheet entry; Section1
Grid to Cathode and Heater 2.9 2.9	3 pF	Published in approved 31LQ6 target datasheet entry; Section1
Plate to Cathode and Heater 0.36 0.6	0.7 pF	Published in approved 31LQ6 target datasheet entry; Section1

CHARACTERISTIC		
PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Plate Voltage	176 V	Published in approved 31LQ6 target datasheet entry; Section1
Voltage 30 30	30 V	Published in approved 31LQ6 target datasheet entry; Section1

PARAMETER	PUBLISHED VALUE	CONDITION / NOTE
Grid-No.2 (Screen-Grid) Voltage 145 145 145	145 V	Published in approved 31LQ6 target datasheet entry; Section1
Grid-No.1 (Control-Grid) Voltage -35 0	-35 V	Published in approved 31LQ6 target datasheet entry; Section1
Plate Resistance (Approx.)	7000 Ω	Published in approved 31LQ6 target datasheet entry; Section1
Plate Current	95 mA	Published in approved 31LQ6 target datasheet entry; Section1

TUBE TINKER

An independent reference for electronic tubes, vacuum tubes,
and their source documents.

[Catalog](#) [Tube types](#) [Full books](#) [Blog](#) [Feedback & corrections](#)

© 2026 Tube Tinker