

STABILISING TUBE



Heavy-duty neon-filled voltage stabiliser.

13201A

OPERATING CONDITIONS


V ignition max.	135	V
V burning	90-110	V
I quiescent	100	mA
I max	200	mA
I min	15	mA
A.C. resistance	80	Ω

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

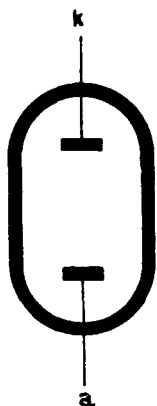

BRITISH 4-PIN BASE

DIMENSIONS

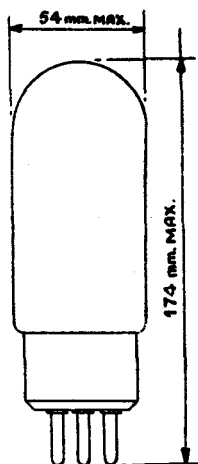

I3201A

STABILISING TUBE

Heavy-duty neon-filled voltage stabiliser.

